




InterTran Corporation

890 Cape Horn Road York, PA 17402
Tel (717) 755-7567 Fax (717) 755-7568 Cell: (443) 831-9705
Email: voilage@verizon.net

Lifting Jack Installation – HD-I
Hyundai – Rotem USA
Carrying capacity 4 x 15 t (50 000 967)
Operation/Maintenance manual
Year: 2008 Rev.: 2; Page 11



8.3 Installation scheme

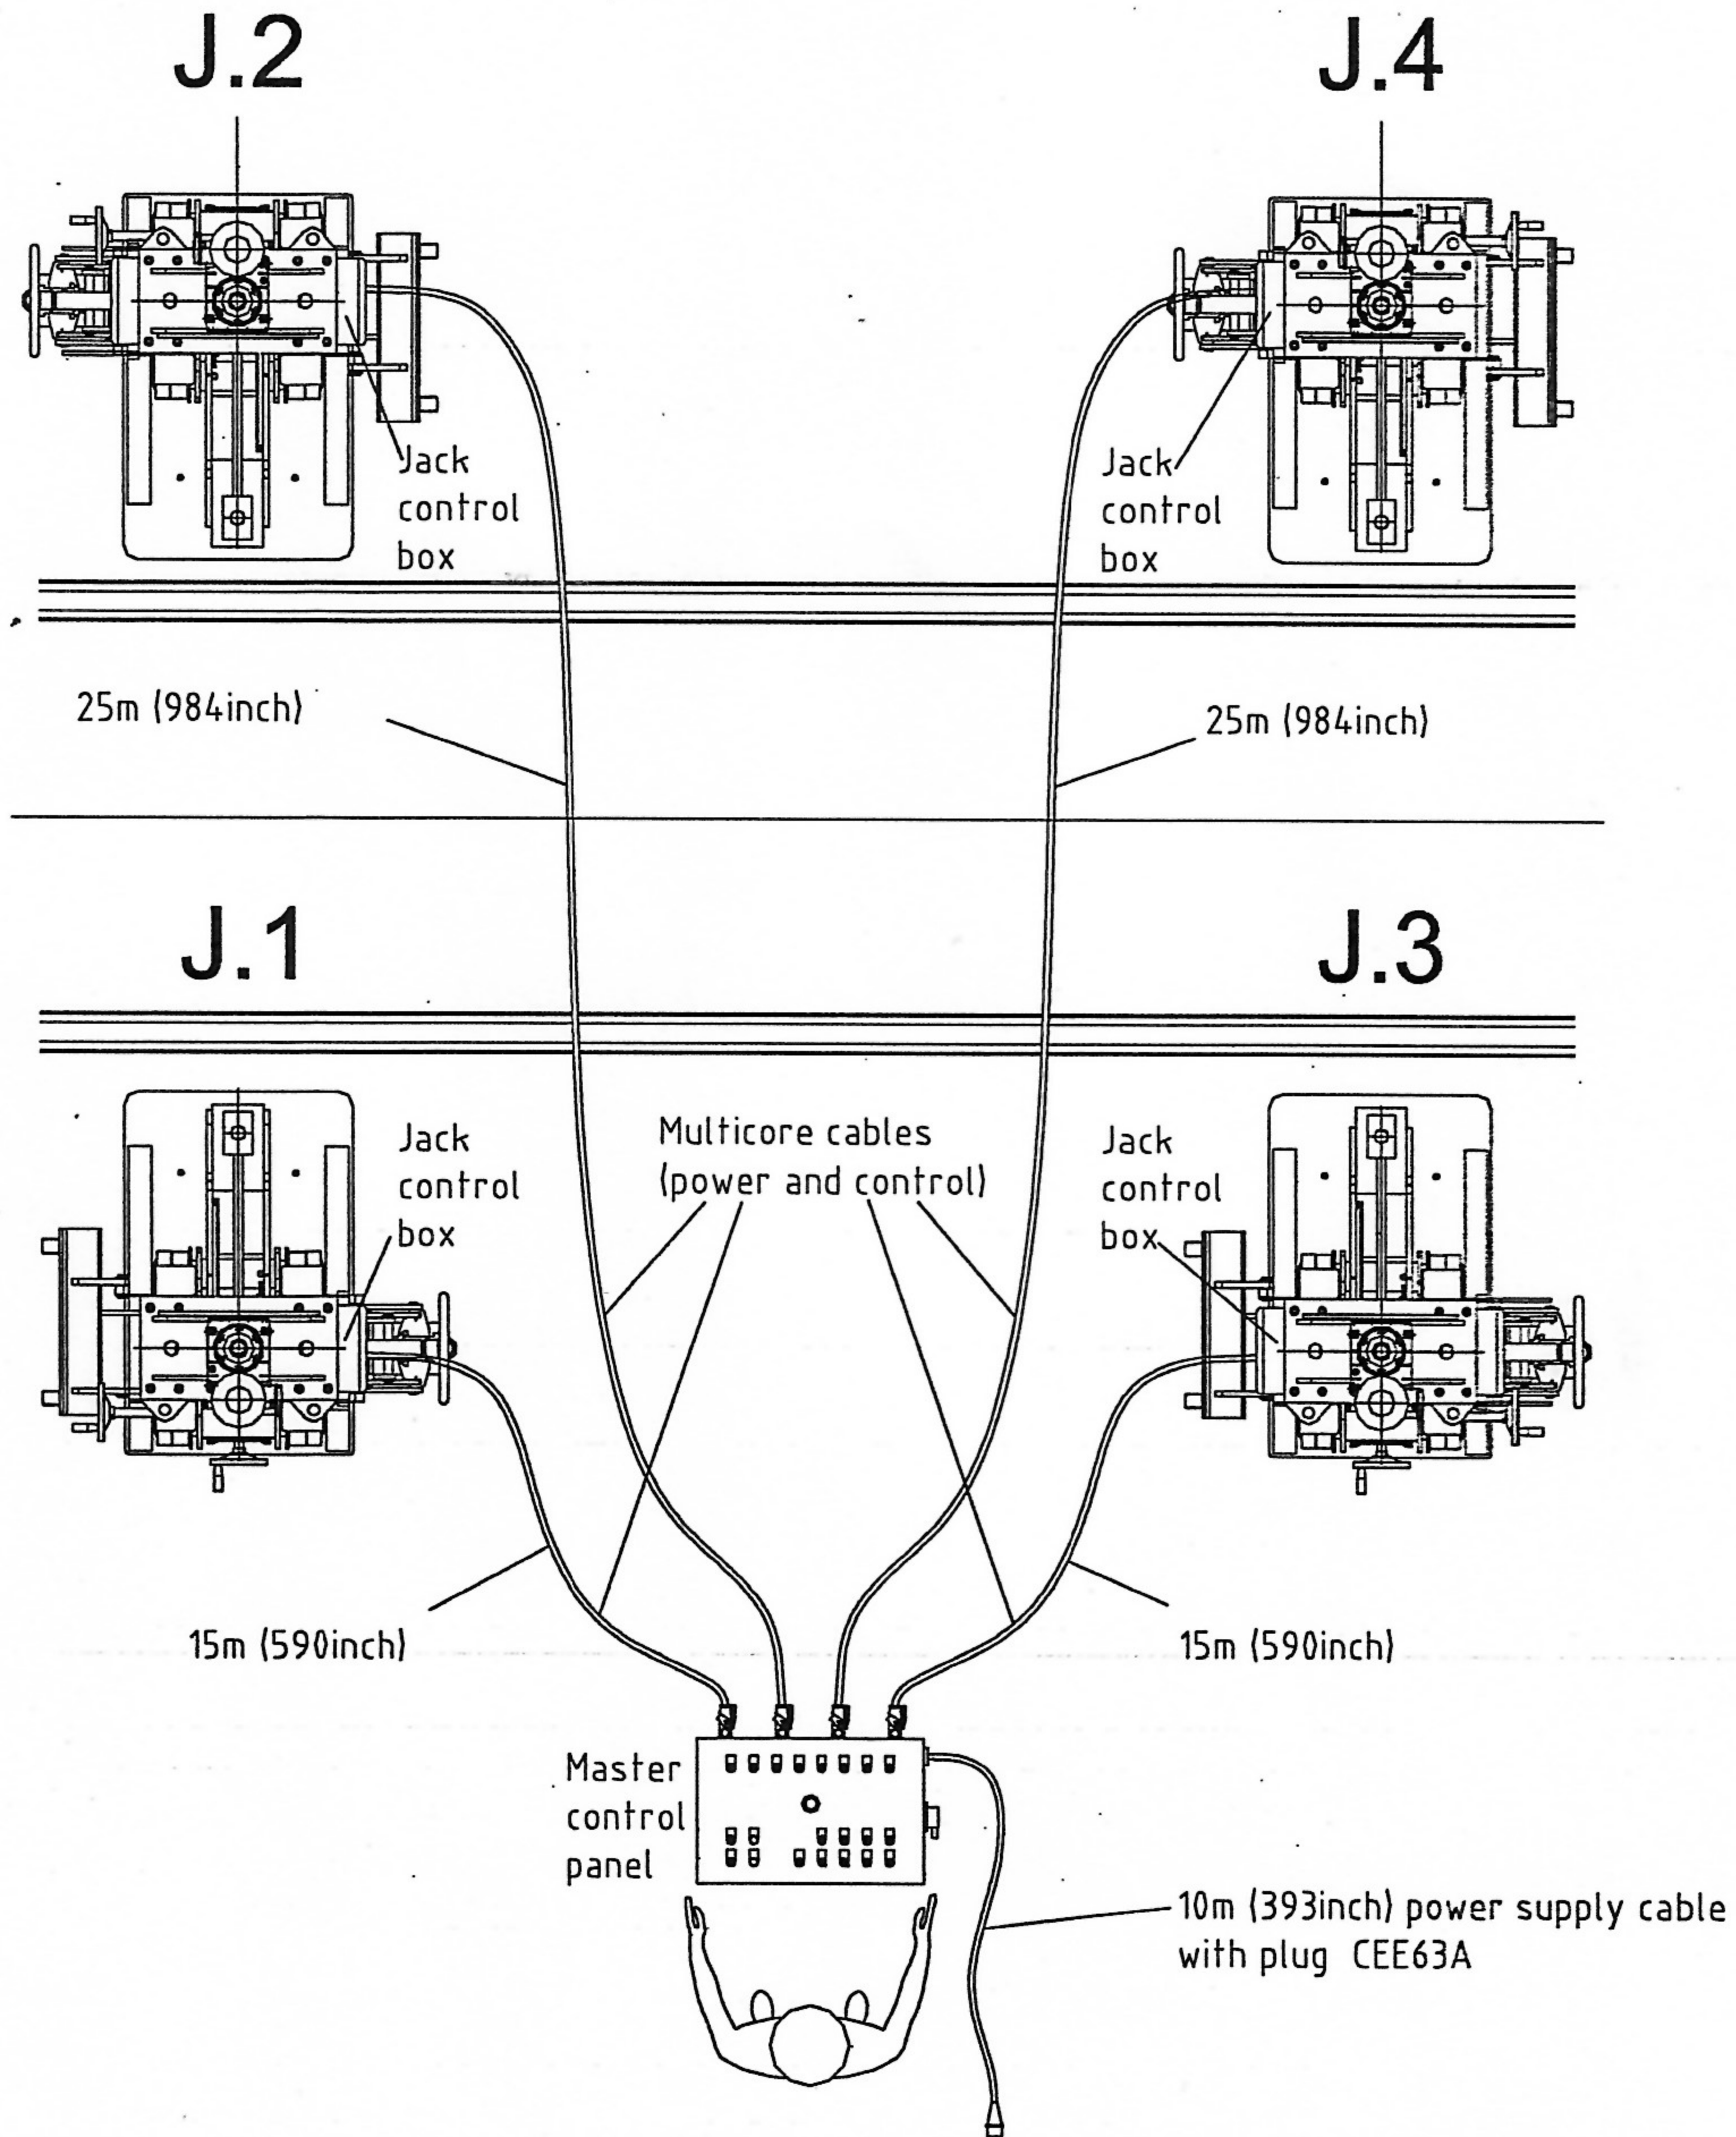

- The control panel is mobile and can be moved on plastic wheels.
- Power supply cable is 3-phases + PE, with plug (63A – 6h 3ph + PE plug (4 pins)). Socket must be provided by the customer.
- Connect the correct plug from the lifting jack with the numbered socket of the control panel
- The cable laying is in standard design on the floor.