



STANDARD JACK DIMENSIONS (35 TON)

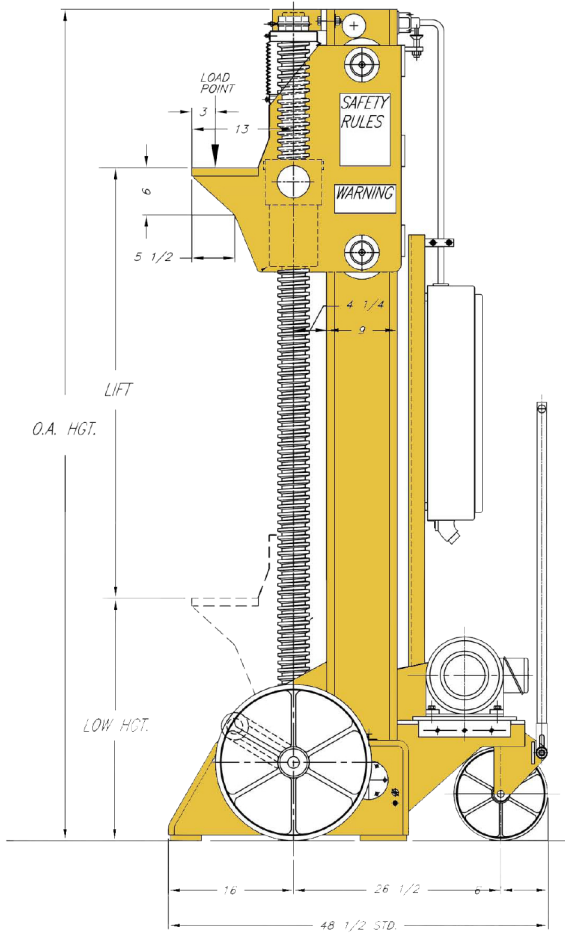

OPTIONAL LIFTING BRACKET DESIGNS

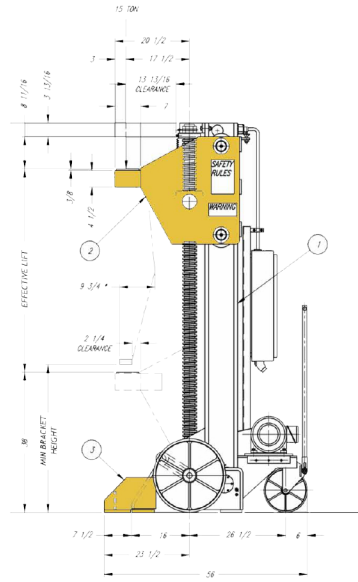

The lifting bracket on our jacks can be modified to suit any application and required clearances to a railcar vehicle body.

STANDARD JACK SPECIFICATIONS

| MODEL | CAPACITY (metric ton) | HP (kw) | SPEED I.P.M. (mm/min) | EFFECTIVE LIFT (mm) | MINIMUM BRACKET HEIGHT (mm) | SCREW DIA (mm) | HEIGHT (mm) | WIDTH (mm) | LENGTH (mm) | WEIGHT (kg) |
|-------|--------------------------|----------------|-----------------------------|---------------------------|--------------------------------------|----------------------|----------------------|---------------------|---------------------|---------------------|
| MA* | 25 tons (22.5) | 5 (3.73) | 9"/min (229) | 6' 0" (1828mm) | 2' 7" (787) | 3'15/16" (100) | 10' 2-1/2" (3112) | 3' 5-1/2" (1054) | 4' 0-1/2" (1232) | 2800 lbs (1270) |
| MA* | 35 tons (31.5) | 7.5 (5.59) | 9"/min (229) | 6' 0" (1828mm) | 2' 7" (787) | 3'15/16" (100) | 10' 2-1/2" (3112) | 3' 5-1/2" (1054) | 4' 0-1/2" (1232) | 2800 lbs (1270) |
| MB | 50 tons (45) | 12.5 (9.32) | 8"/min (203) | 6' 6" (1981mm) | 2' 9" (838) | 4'15/16" (125) | 12' 1-7/8" (3731) | 3' 5-1/2" (1054) | 4' 5-7/8" (1368) | 4700 lbs. (2132) |
| MC | 60 tons (54) | 15 (11.20) | 8.5"/min (216) | 5' 7" (1702mm) | 2' 9" (838) | 4'15/16" (125) | 11' 6-7/8" (3528) | 3' 5-1/2" (1054) | 4' 6-3/8" (1381) | 5000 lbs (2262) |

*Please note that the 25 and 35 Ton jacks also come in a standard MAL Model with a minimum bracket height of 2'-3" (686mm) instead of 2'-7" (787mm).