



Rush Crane Systems S047
2575 North I-25

RCS (MANX 1970C) Q-6
Pete 348/18FF/40RR
Paccar PX-9 345HP/1150#/10-Sp
Quote #6

Converse, Texas United States 78109
Phone:
Fax:
Email:

Phone:
Fax:
Contact Email:
Prepared for: Default Contact

Vehicle Summary

Unit		Chassis	
Model:	Model 348	Fr Axle Load (lbs):	18740
Type:	Full Truck	Rr Axle Load (lbs)	40000
Description:	Pete 348 - for Manitex 1970C	G.C.W. (lbs):	58740
Application		Road Conditions:	
Intended Serv.:	Construction/Block	Class A (Highway)	95
Commodity:	Construction Materials	Class B (Hwy/Mtn)	5
Body		Class C (Off-Hwy)	0
Type:	Winch or Crane	Class D (Off-Road)	0
Length (ft):	20	Maximum Grade:	6
Height (ft):	12.0	Wheelbase (in):	242
Max Laden Weight (lbs):	21000	Overhang (in):	134
Trailer		Fr Axle to BOC (in):	69.8
No. of Trailer Axles:	0	Cab to Axle (in):	172.2
Type:		Cab to EOF (in):	306.2
Length (ft):	0	Overall Comb. Length (in):	442
Height (ft):	0.0	Special Req.	
Kingpin Inset (in):	0	California Registry	
Corner Radius (in):	0		
Restrictions			
Length (ft):	65		
Width (in):	102		
Height (ft):	13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

	Ask your dealer for a quote today, or visit our website @ www.paccarfinancial.com .
	PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



Rush Crane Systems S047
2575 North I-25

RCS (MANX 1970C) Q-6
Pete 348/18FF/40RR
Paccar PX-9 345HP/1150#/10-Sp
Quote #6

Converse, Texas United States 78109
Phone:
Fax:
Email:

Phone:
Fax:
Contact Email:
Prepared for: Default Contact

	Description	Weight
Base Model		
	Model 348	10,640
	Construction Materials	0
	Construction/Block Truck or tractor used in the construction industry. Use typically involves operating on the job site, delivering construction materials, or to position equipment (crane) for its intended use at the construction site. Includes such activities as water tanker and delivery of precast concrete, bricks, blocks, and bag cement.	0
	Winch or Crane	0
	California Registry Required for all vehicles that will be registered in the State of California.	0
Configuration		
	Other Secondary Manufacturer (Specify by narrative) N02000 Manitex Boom Truck, or N02010 CVS-Houston	0
Frame & Equipment		
	10-3/4in Steel Rails 403-444in 10.75x3.5x.375 Dimension, 2,136,000 RBM; Yield Strength: 120,000 psi. Section Modulus: 17.8 cubic inches. Weight: 1.74 lbs/inch pair	858
	Full Steel Inner Liner	782
	Custom Wheelbase or Overhang Engineering approval may be required.	0
	Inset End-of-Frame Xmbr N06100 INSET (2) FULL SIZE FILL-IN N06110 IN AF AREA	0
	Three-Piece Crossmembers	0
	Inset End-of-Frame Xmbr 10in For Use with 0613010	0
	FEPTO Provision 27.8in Bumper Extension Includes Crankshaft Adapter Plate and Stationary Grille. Requires FEPTO Bumper.	86
	EOF Square with Steel Xmbr	0
	Peterbilt Rear Mudflaps and Straight Hangers	25

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



Description	Weight
Front Axle & Equipment	
Dana Spicer D2000F 20,000 lb, 3.5in Drop Factory front axle alignment to improve handling & reduce tire wear. Zerk fittings on tie rod ends, king pins, & draglink ball joints for ease of maintenance & help extend service life of components. Cognis EMGARD® FE 75W-90 synthetic axle lube provides over 1% fuel economy improvement. Reduces wear & extends maintenance intervals, resulting in increased uptime. Provides improved fluid flow to protect components in extreme cold conditions & withstand the stress from high temperatures, extending component life.	445
Taper Leaf Springs, Shocks 20,000 lb Standard with Heavy Resistance Shocks.	0
Power Steering Sheppard HD94 Dual For use with 16,000 to 20,000 lb. axle ratings.	0
Power Steering Reservoir Frame Mounted w/Cooler	2
PHP10 Aluminum LMS Hubs 11-1/4" bolt circle. Includes a supplier extended coverage up to 3 years / 350,000 miles for bearings & seals.	0
Bendix Air Cam Front Drum Brakes 16.5x7 For use with 16,000 lbs to 22,000 lbs steer axles or front drive axles. Includes automatic slack adjusters & outboard mounted brake drums.	0
Dust Shields, CAM And Air Disc Brakes, Front Axle	4
Long Stroke Brakes, Front Axle	0
Gusseted Cam Brackets, Steer Axle	0
Heavy Duty CAM Bushings, Steer Axle	0

Rear Axle & Equipment	
Dana Spicer DSP41 40,000 lb Interaxle diff lock air rocker occupies space of one gauge. Laser factory axle alignment to improve handling & reduce tire wear. Magnetic rear axle oil drain plug captures & holds any metal fragments in drive axle lube to extend service life. Parking brakes on all drive axles for optimal performance. Cognis EMGARD® FE 75W-90 synthetic axle lube provides over 1% fuel economy improvement. Reduces wear & extends maintenance intervals, resulting in increased uptime. Provides improved fluid flow to protect components in extreme cold conditions & withstand the stress from high temperatures, extending component life.	2,125
PHP10 Iron LMS Hubs 11-1/4" bolt circle. Includes a supplier extended coverage up to 3 years / 350,000 miles for bearings & seals.	0
Long Stroke Parking Brakes, Drive Axle(s)	20
Dust Shields For Cam Brakes, Drive Axle(s)	15
Diff Lock Both Axles (Air Rocker Switch occupies the space of one gauge)	60
Bendix Smart ATC Traction Control	2
Rear Brake Camshaft Reinforcement	9

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



Description	Weight
Lube Pump, Drive Axle(s)	36
Gusseted Cam Brackets, Drive Axle(s)	2
SBM Valve Full trucks require a spring brake modulation (SBM) system for emergency braking application. This system requires an SBM valve and a relay valve with spring brakes on the rear axles. The SBM valve allows the foot valve to operate the rear axle spring brakes if a failure exists in the rear air system.	0
Stability System Not Selected or Not Available	0
Anti-Lock Braking System (ABS) 6S6M ABS-6. Includes air braking system.	35
Synthetic Axle Lubricant All Axles Peterbilt heavy duty models include Fuel Efficient Cognis EMGARD FE75W-90 which provides customers performance advantages over current synthetic lubricants with reduced gear wear and extended maintenance intervals, resulting in increased uptime. In addition, the lubricant provides improved fluid flow to protect gears in extreme cold conditions and withstand the stress from high temperatures, extending component life.	0
Bendix Air Cam Rear Drum Brakes 16.5x7 Inc automatic slack adjusters & outboard mounted brake drums.	0
Tandem Drive Axle (Model 348)	0
Ratio 4.33 Rear Axle	0
Chalmers 854, 40,000 lbs, 54in AS	800
Low Mount Saddle Height, Chalmers	0
Beam Shocks for Chalmers Suspension Type 1 Installation, beam to outside frame.	35
High Stability Restrictor Can, Chalmers #29	0

Engine & Equipment

PACCAR PX-9 345@1900 GOV@2100 1150@1400 (2013 Emissions) Includes aluminum flywheel housing. Chevron Delo LE SAE 10W30 engine oil is specially formulated for new low emissions engines. Magnetic engine oil drain plug captures and holds any metal fragments in engine oil to extend service life. N21320 N205 120..Standard Maximum Speed Limit [LSL] N21330 N207 0...Expiration Distance N21340 P005 120..Hard Maximum Speed Limit N21350 P001 70...Maximum Accelerator Pedal Vehicle Speed N21360 P110 0...Accelerator Lower Droop N21370 P059 76...Maximum Cruise Speed N21380 P111 0...Cruise Control Lower Droop N21400 N203 252..Reserve Speed Function Reset Distance N21410 N202 0...Maximum Cycle Distance N21420 N206 10...Maximum Active Distance N21430 N201 0...Reserve Speed Limit Offset N21440 P015 NO...Engine Protection Shutdown	0
--	---

**Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.**

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



Description		Weight
N21450	P026 NO...Gear Down Protection	
N21460	P046 1400.Max PTO Speed	
N21470	P062 NO...Cruise Control Auto Resume	
N21480	P068 NO...Auto Engine Brake in Cruise	
N21500	N209 0...Expiration Distance	
N21510	P520 Yes..Enable Idle Shutdown Park Brake Set	
N21520	P030 5....Timer Setting	
N21530	P233 Yes..Enable Impending Shutdown Warning	
N21540	P234 60...Timer For Impending Shutdown Warning	
N21550	P516 35...Engine Load Threshold	
N21570	P031 No...Idle Shutdown Manual Overrule	
N21590	P230 Yes..Enable Hot Ambient Automatic Overrule	
N21610	P172 40...Low Ambient Temperature Threshold	
N21620	P173 60...Intermediate Ambient Temperature Threshold	
N21630	P171 80...High Ambient Temperature Threshold	
Engine Idle Shutdown Timer Disabled		0
Enable EIST Ambient Temp Overrule		0
Eff EIST NA Expiration Miles		0
Effective VSL Setting NA		0
Remote PTO And Throttle Provision		0
CARB Engine Idling Compliance		0
PACCAR PX-7, PX-9 and MX, Cummins ISL, ISM and ISX diesel engines will include the required factory installed serialized sticker on the drivers door to identify them as meeting the NOx idling standard.		
160 Amp Alternator, 36 SI Brushless		0
Immersion Type Block Heater 110-120V		2
Standard location is center left hand under cab and includes a weather-proof cover that protects the receptacle. This pre-heater keeps the coolant in the engine block from freezing when the engine is not running.		
PACCAR 12V Starter		0
3 Optima DT31T Batteries 2700 CCA Threaded		55
Stud type terminal. AGM (Absorbent Glass Material). Stranded copper battery cables are double aught (00) or larger to reduce resistance.		
Battery Disconnect Switches (2) Mounted in Cab LH		9
Side of Driver Seat		
Battery Jumper Terminal Mounted Under Hood		4
LH Frame Rail. Not available with PX-7 engines.		
2-Speed Fan Clutch For Frequent Start/Stops		0
18.7 CFM Air Compressor		0
Furnished on engine. Teflon lined stainless steel braided compressor discharge line.		
C-Brake By Jacobs, PX-9		90
Spin-On Fuel Filter/Water Separator, 12V Heated		0
Frame Mounted. In addition to the fuel filter supplied with the engine. Includes fuel water separator on Models 330, 337, and 348.		

**Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.**

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



Description	Weight
High Efficiency Cooling System Silicone radiator & heater hoses enhance value, durability, & reliability. Constant tension band clamps reduce leaks. ClimaTech extended life coolant extends maintenance intervals which reduces maintenance costs. Anti-freeze effective to -30 degrees F helps protect the engine. Low coolant level sensor warns of low coolant condition to prevent engine damage. Radiator Size by Model: 587: 1330 sq in, 579/367 FEPTO 1325 sq in, 567/365/367: 1440 sq in, 384/386: 1301 sq in, 382/365 FEPTO: 1184 sq in, 389/367 HH: 1669 sq in, 348: 1000 sq in.	0
Radial Seal, Dry Type Air Cleaner, Frontal Air Intake. Molded rubber air intake connections with lined stainless steel clamps seal to prevent contaminants in air intake.	0
Exhaust Single RH Side Of Cab DPF/SCR RH under cab. Includes cab entry RH under cab and full round stainless steel exhaust guard.	0
Curved Tip Standpipe(s)	0
24in Ht, 5in Dia Chrome, Clear Coat Standpipe(s)	0
Transmission & Equipment	
Fuller RTO14908LL 10-Speed 1450 Torque - Includes rear transmission support, direct shift pattern, 15.5in ceramic 7-spring easy pedal/3600# plate/1650 torque clutch. Synthetic lubricant to reduce friction, improve efficiency, & extend component life. Magnetic transmission oil drain plug captures & holds any metal fragments in transmission oil to extend service life. Torque limiting clutch brake. Forward Ratios: LL-14.56, L-9.42, 1st-6.24, 2nd-4.63, 7th-1.00, 8th-0.74 / Reverse Ratios: LL-15.22, L-9.85, H-2.89	365
1760 HD Driveline, 1 Midship Bearing	-20
(1) Dash Mounted Single Acting Air PTO Control Standard with PTO engaged indicator light on Class 8 units. Occupies the space of one gauge.	0
Park Brake Interlock For use with transmission mounted PTO.	2
Aluminum Transmission Bell Housing IPO Iron Fuller transmission 1450 torque and above	-52
Neutral Start Switch (For use with manual transmission)	0
Manual Shifter, Black	0
Remote Lube Hoses for Clutch Linkage, Release Bearing and Cross Shafts - Mounted to LH Frame Rail	6

Air & Trailer Equipment

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



Description	Weight
Bendix AD-IS Air Dryer with Heater An integrated system air dryer that incorporates the functions of the air dryer, purge reservoir (which increases the drying capacity), wet air tank, pressure relief valve, single check valves, and pressure protection valve for air susp and other air accessories. Includes easy-to-service spin-on dessicant cartridge.	0
Berg Pull Cord Drain Valve(s) - All Air Tanks	0
Nylon Chassis Hose	0
Steel Painted Air Tanks All air tanks are steel with painted finish except when Code 4543330 Polish Aluminum Air Tanks is also selected (then exposed air tanks outside the frame rails will be polished aluminum). Peterbilt will determine the optimal size and location of required air tanks. Narratives requesting a specific air tank size or location will not be accepted for factory installation. See ECAT to determine number or location of air tanks installed.	0
High Mount Air Tanks BOC/BOS Where Possible Subject to frame review.	0
Body Connections 5ft BOC Junction Box contains light and power circuits for Body Connections located 5ft from BOC.	4
Tires & Wheels	
FF: BR 18ply 385/65R22.5 M854 Diameter = 42.9 inches; SLR = 19.8 inches	110
RR: BR 14ply 11R22.5 M843 Diameter= 42.5 inches; SLR= 19.9 inches	192
Code-rear Tire Qty 08	0
FF: Alcoa 823627 LVL1 Plt 22.5X12.25 Alm Whl	-16
RR: Alcoa 883677 LvL1 22.5x8.25 Alm Whl	-200
Code-rear Rim Qty 08	0
Fuel Tanks	
26in Aluminum 60 Gallon Fuel Tank RH BOC Addl Paddle handle filler cap with threadless filler neck. Top draw fuel plumbing reduces chance of introducing air into the fuel system during low fuel level conditions due to the central placement of fuel pickup tube. Wire braid fuel lines increase durability & reduce potential for leaks. N55540 MOUNT RH F/T REARMOST POSSIBLE N55550 MAKE 7 FWD OF FWD REAR	86
26in Aluminum 50 Gallon Fuel Tank LH U/C Includes steps for cab access. Paddle handle filler cap with threadless filler neck. Top draw fuel plumbing reduces chance of introducing air into the fuel system during low fuel level conditions due to the central placement of fuel pickup tube. Wire braid fuel lines increase durability & reduce potential for leaks.	7
Location LH U/C 50 Gallon	0
Location RH BOC 60 Gallon	0
Unpublished options may require review/approval. Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.	

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



Description	Weight
Locate Fuel Tanks Back As Far As Possible N56500 Locate RH F/T rearmost N56510 possible	0
DEF Tank Mounted LH Under Cab	0
Standard DEF To Fuel Ratio 2:1 Or Greater	0
Polished Stainless Steel Cover For DEF Tank	0
DEF Tank Small	0
Battery Box & Bumper	
Omit Standard Battery Box (For use with passenger seat/in-cab battery box codes only)	-45
Polishing Battery/Tool Box(s), Aftertreatment Cab Entry complete	0
Aftertreatment RH U/C Alum Non-Slip Cab Entry Step. DPF/SCR for diesel engines, catalyst for natural gas engines. On Models 579 specifying chassis fairings, the box will be aerodynamic.	0
Aluminum Bumper Swept Back Polished, FEPTO only With two tow pins and step plates on top of bumper.	35
Cab & Equipment	
Alum Cab 108in BBC Metton Hood w/Bright Crown Includes view window RH door and convex mirror over RH door.	0
Key All Units Alike Please add your 3 digit key code number in the key code field.	0
Severe Service Cab Package #1 Includes Aluminum side skins, aluminum rear skin, steel windshield mask, steel firewall, and steel front floor sheet on all cabs, and additional reinforcement structure on the back wall of the day cab.	39
Thermal Insulation Package in Cab Includes thick, closed-cell foam in floor, special mylar-faced foam in walls and roof structure.	2
KEY G479	0
Rubber Fender Lips 2 Inch Wide	8
Peterbilt UltraRide Driver Seat	0
Peterbilt UltraRide Passenger Seat	0
Drivers Armrest - RH Only Required in Model 587 with Evolution LX seats. Optional with Evolution ST and Rolltek Seats.	2
Passenger Armrest - LH only Required with Evolution LX seats, optional with Evolution ST Seats.	2
Mounted On In-Cab Battery Box For use with non-air passenger seats only.	39
Air Ride Driver	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



Description	Weight
High Back Driver	0
Fabric Driver	0
Low Back Passenger	0
Vinyl Passenger	0
Manifest Pouch on Rear Cab Wall	0
Adjustable Steering Column - Tilt/Telescope	11
Steering Wheel with Peterbilt Logo Steering Wheel with embossed Peterbilt logo over horn button.	0
Interior Grey/Black Includes rugged charcoal instrument panels, glare-resistant gray dash, black bezels on gauges, (2) power ports, monochromatic molded door pads with durable in-mold color, gray molded back wall, 18 inch 4-spoke soft-touch steering wheel, soft-touch steering column cover, power lift passenger window, extruded rubber floor covering, header-mounted dome light, foot well lighting, integrated "dead pedal", (4) inside entry grab handles, (2) inside sunvisors, (2) coat hooks, (2) cup holders and map bin in dash.	0
Extended Rear Window ipo Std Window-Day Cab The extended rear window protrudes two inches more than the standard conventional rear cab window. Take this into consideration when determining your loadspace.	0
Day Cab Rear Window	0
One Piece Curved Windshield	0
Combo Fresh Air Heater/Air Conditioner With radiator mounted condenser, dedicated side window defrosters, Bi-Level Heater/Defroster Controls, 54,500 BTU/HR, and silicone heater hoses.	0
Cup Holder (Floor Mounted) Includes two standard-size drink holders and one extra-large jugholder, coin tray, and clipboard-size storage area.	4
Peterbilt Comfort Control - Cab	6
Outside Sunvisor - Stainless Steel Available for Day Cab and Low Roof Sleeper.	4
Stainless Steel Mirrors 7x16 with Heat Element Right Click on Option to see Picture in Product Portfolio.	2
(2) Convex 8 Inch SS Mirror Center mounted under mirror bracket. If rear view mirrors are heated, the convex mirrors will be heated. Option includes dual door stops.	4
Power Package Includes power door locks and power windows.	0
(1) Air Horn 24.5in Chrome - Round w/Horn Shield	8
Mount Air Horn Logger Style - RH	2
Standard Speaker Package For Cab (2) Speakers	4

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



Description	Weight
ConcertClass Without CD, Includes BT Phone and Audio, AM/FM, WB, USB and MP3.	10
Radio Antenna Mounted Logger Style Antenna Mounted LH on BOC In Place of Center Roof position on Conventional Models. Models 579 and 567 Antenna Mounted LH Roof In Place Of Center Roof position.	0
Power Wire Under Dash for F/O Cellular Phone Without antenna. Not available with Rami Antenna System.	0
Plug-In Auto Reset Circuit Breaker in place of fuses in junction box.	0
Peterbilt Electric Windshield Wipers With Intermittent Feature.	0
CabMate Cab Air Suspension Mfg by Link. The class 8 conventionals (except Model 348) includes (2) airbags, (2) shock absorbers, (1) leveling valve, radius rod, and height limiter. The Models 330, 337, and 348 includes (1) airbag and (1) shock absorber.	15
Triangle Reflector Kit Shipped Loose	13
5 lb 3A:40bc Fire Extinguisher Cab Mounted	8
Backup Alarm (107dB)	3
Air Restriction Indicator Mounted on air cleaner or intake piping.	0
Bright Bezel Gauges	0
Main Instrumentation Panel, Graphics Display Includes speedometer with tripodometer, tachometer with hourmeter and outside air temperature display, voltmeter, engine oil pressure, engine coolant temperature, fuel level, primary and secondary air pressure gauges. Includes standard warning light package: high water temperature, low oil pressure, and low air pressure warning lights w/audible alarms, high beam, turn signal, low fuel, parking brake, and ice warning indicators; seat belt reminder; rocker switches with long-life LED indicators; multi-function turn stalk with flash-to-pass feature (night mode flashes headlights and marker lights; day mode flashes headlights only), intermittent windshield wiper and headlamp beam control. Hydraulic braked trucks do not include air pressure gauges.	0
Headlights Composite Fender Mounted Integral Park, Turn, and Side Marker	0
(5) Marker Lights, Aero LED Light Emitting Diodes	0
(2) Addl Dome/Reading Lights, Ceiling Mounted	0
(2) Load Lights, Flush Mounted Low Outboard Loc B	4
(2) Load Lights, Bracket Mounted Inboard Loc K DayCab	6

**Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.**

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



	Description	Weight
	(1) F/O Load Light, Switch & 10ft Wire Coil Under / in cab / sleeper	2
Paint		
	Standard Paint Color Selection	0
	(1) Color Axalta Two Stage - Cab/Hood	0
	Base Coat/Clear Coat	
	N85020 A - L0006EB WHITE - Stand	
	N85400 HOOD TOP L0006EB WHITE - Stand	
	N85500 CAB ROOF L0006EB WHITE - Stand	
	N85200 FRAME N0001EA BLACK	
	N85300 FENDER L0006EB WHITE - Stand	
Shipping Destination		
	Shipping Destination	0
	(Specify by narrative attached to option code). In Presentation Information screen add "See Instructions" for the Shipping Destination instead of Dealer code.	
	N89900 CVS - HOUSTON	
	N89910 10000 NORTH LOOP EAST	
	N89920 HOUSTON, TX 77029	
	N89930 ATTN: STEVE R 713-495-6342	
Options Not Subject To Discount		
	Medium Duty Emissions Surcharge	0
	Vehicle Layout	0
	Option is not subject to discount. Fleets will be split prior to build so that the charge is applied to only one unit. Quotes will not reflect this.	
	N94000 BUILD SIMILAR TO VIN 217838	
Miscellaneous		0
Total Weight		16813

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/26/2016 2:48:04 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q10804572
Prepared by:	Administrator		Version Number:	32.00



Rush Crane Systems S047
2575 North I-25

RCS (MANX 1970C) Q-6
Pete 348/18FF/40RR
Paccar PX-9 345HP/1150#/10-Sp
Quote #6

Converse, Texas United States 78109

Phone:

Fax:

Email:


Phone:

Fax:

Contact Email:

Prepared for: Default Contact

Horizontal Dimensions

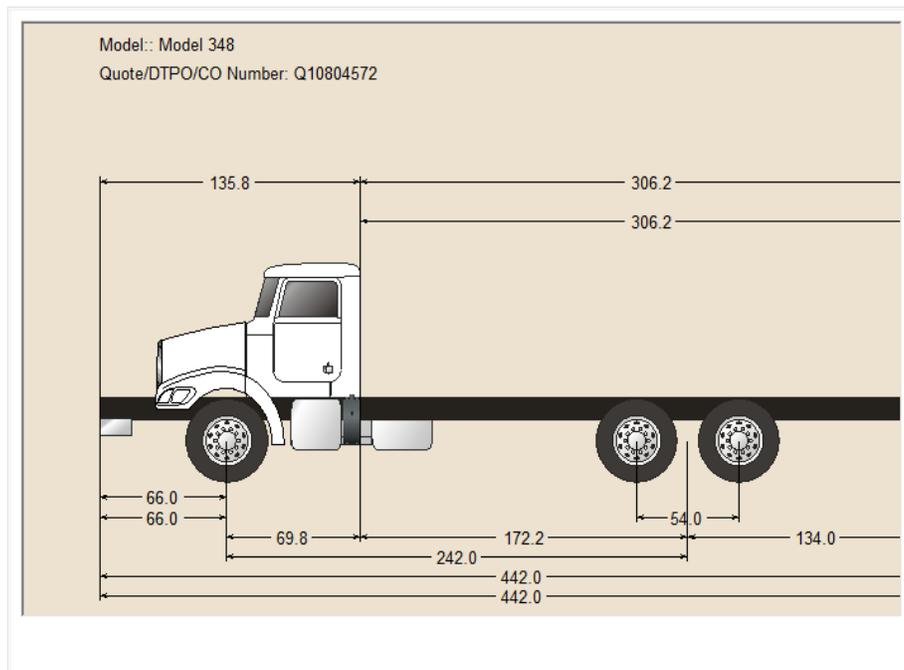

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/26/2016 2:48:43 PM
Effective Date: Jan 1, 2016
Prepared by: Administrator

Complete

Model Number: Model 348
Quote/DTPO/CO: Q10804572
Version Number: 32.00



Rush Crane Systems S047
2575 North I-25


Converse, Texas United States 78109
Phone:
Fax:
Email:

RCS (MANX 1970C) Q-6
Pete 348/18FF/40RR
Paccar PX-9 345HP/1150#/10-Sp
Quote #6

Phone:
Fax:
Contact Email:
Prepared for: Default Contact

Weight Distribution

Weight Distribution Actual performance of a specific unit can be affected by your operating conditions. The performance calculations should only be used as a guideline.

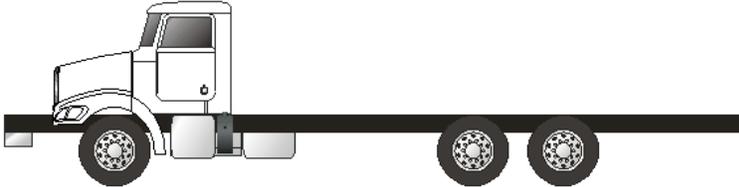Truck Spec	Auxiliary Payload
Model: Model 348 Quote/DTPO/CO Number: Q10804572	
	
<small>Recommended Payload Center of Gravity to achieve specified ground loads; measured from centerline of drive axles: 55 in. from the centerline of the drive axle(s).</small>	
Weight (lbs)	Front Rear Total
Chassis	8591 8222 16813
Tools/Driver	305 70 375
Fuel & DEF	626 268 894
Max Payload	9218 31440 40658
Auxiliary Payload	0 0 0
Total	18740 40000 58740

**Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.**

Printed: 1/26/2016 2:49:16 PM
Effective Date: Jan 1, 2016
Prepared by: Administrator

Complete

Model Number: Model 348
Quote/DTPO/CO: Q10804572
Version Number: 32.00