


# ATLAS

1404 ZW • 1404 ZW Friction wheel • 1604 ZW • 16.5 to 22 Tons

SAFE. POWERFUL. RELIABLE.

## RAIL-ROAD EXCAVATORS

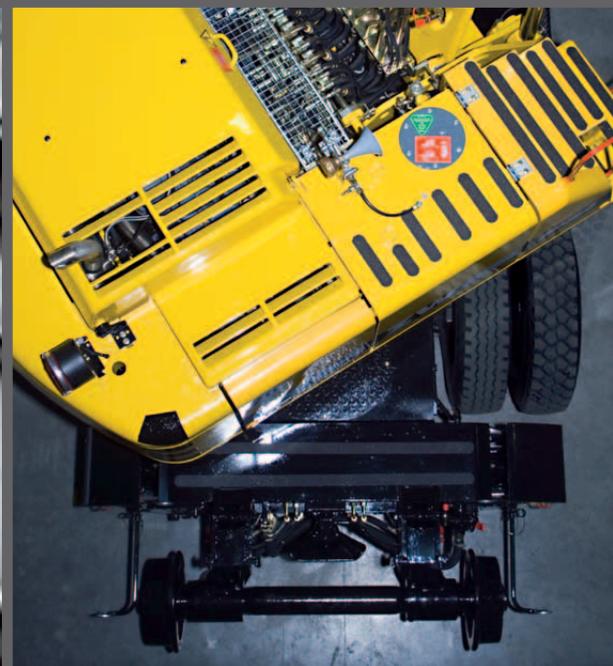

# ATLAS




## SAFE. POWERFUL. RELIABLE.

### BUILDING ON TECHNOLOGY - High-tech excavator for use on rails

ATLAS rail-road excavators were especially developed for use on rails and combine optimum mobile excavator technology with the most up-to-date know-how for rail use. This is your guarantee for top performance, even with difficult track conditions.

We were the first to put an excavator on rails in 1965. We were market and technology leaders in this field back then and still are today. As the sole world-wide supplier, we offer the computer assisted rail contact pressure system (CARSY). We are the sole manufacturer in Europe of rail-road, short tailswing excavators with a swing radius of less than 2000 mm. We can offer any chassis configuration to fit any rail network for our world-wide customers.

Take advantage of our many years of know-how and experience for your application: on rail, alongside the track and mounted on the railway wagon.

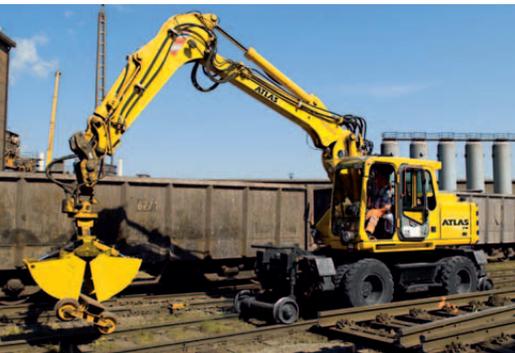

**The right choice every time -  
We offer rail-road excavators of two types.  
In particular, the excavators comply with the  
latest construction requirements of the  
German Federal Railways**

#### **1404 ZW with the CARSY-System**

17 - 20 t  
75kW (102HP)  
Tailswing: 1575, 1750, 2000 mm

#### **1404 Friction wheel**

16.5 - 17.5 t  
75kW (102HP)  
Tailswing: 1575, 1750, 2000 mm

#### **1604 ZW with the CARSY-System**

21 - 22 t  
95kW (129HP)  
Tailswing: 1750, 2000 mm



# RAIL-ROAD EXCAVATOR

## ATLAS - Construction machinery manufacturer with tradition

When in 1919 Hinrich Weyhausen started selling construction and agricultural machinery, he stated that the machines his clients actually needed did not exist. So he listened carefully and just built the machines by himself – having in mind the requirements of people who used his tools every day. Under the brand ATLAS he passionately performed his pioneer work. However, the technology was never the really important thing, so were always only the benefits. Preserving these values, nothing has changed for us.



## The rail-road excavator

# A PLEASURE IN OPERATION

**Safety, power and fast and comfortable operation set our rail-road excavator apart, making it amongst the most pleasurable machines to operate on rail or on site.**

### Speed - working faster than ever


- The required pressures on the rail guidance wheels are automatically set when the 1404 ZW and 1604 ZW are re-railed. No awkward external adjusting screw to set the contact pressure on the tyres.
- Innovative AWE 4 technology for sensitive, proportional control of all movements irrespective of load. Travel and work simultaneously. This is the big advantage to you.
- Front and rear wheels can be controlled independently (not with the friction wheel version).
- Simple de- and re-railing ensure high operating comfort for fast, safe and efficient operation.

### Tractive force

- Faster on the construction site: the enormous power allows you to use our rail-road excavator as a "shunting locomotive". Both models are approved for 40 T un-braked trailer weight and 120 T braked trailer weight. We can also supply with a wagon brake on request.

### Precise operation - optimised for the track

- 4 outrigger stabilisers (with the 1604 chassis) adapt optimally to the rail embankment.
- Customised specification: tailor your excavator precisely to your requirements from the various superstructures and chassis, for example the superstructure of the 1404 ZW can be mounted on the chassis of the 1604 ZW for maximum stability with ultra short tailswing.
- Counterweights suitable for the application can be rapidly changed.
- The loading gauge for wagons is met.

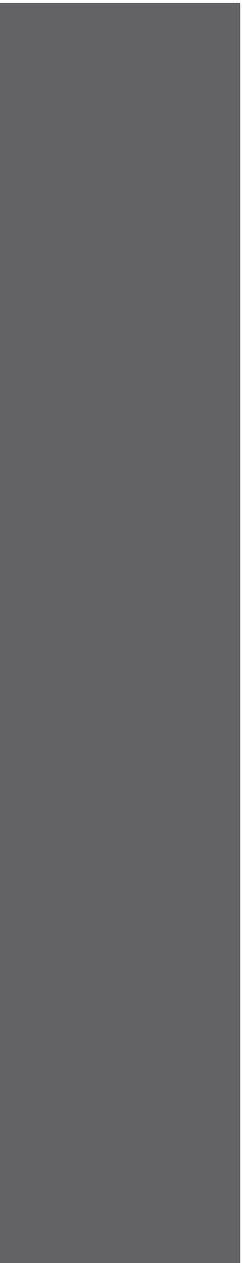

# RAIL-ROAD EXCAVATOR



## **A space-saver - great when it gets tight**

- Rail-road excavator with ultra short tailswing. Choose between the different counterweight options.
- The 1404 ZW features the shortest tailswing on the market at 1575 mm making it suitable without restriction for any spacings between rail tracks.
- For narrow gauge tracks, use the 1404 ZW rail-road excavator friction wheel with its up to 1000mm narrow axles.

## **Reliable - because every minute counts**

**Our market leadership is based on our well-proven technology - tried and tested a thousand times over in the most arduous applications. High-tensile steels, robust electric and electronic components as well as excellent workmanship in all hydraulic components ensure that the excavator is the reliable heart on any construction site.**

You work, we protect



## THOROUGHLY DESIGNED

### Stability

- Low centre of gravity ensures optimum stability in operation. Assisted by a transverse mounted engine.

### Safe on rails

- The outriggers are automatically lifted when the “drive” function is selected. This avoids damage during rail operation.
- Continuous monitoring of contact pressure. (not friction wheel version)
- The air reservoirs of the wagon brake are located in the superstructure and chassis and are very well protected.
- De-railing of the bogie by the outriggers is automatically eliminated.

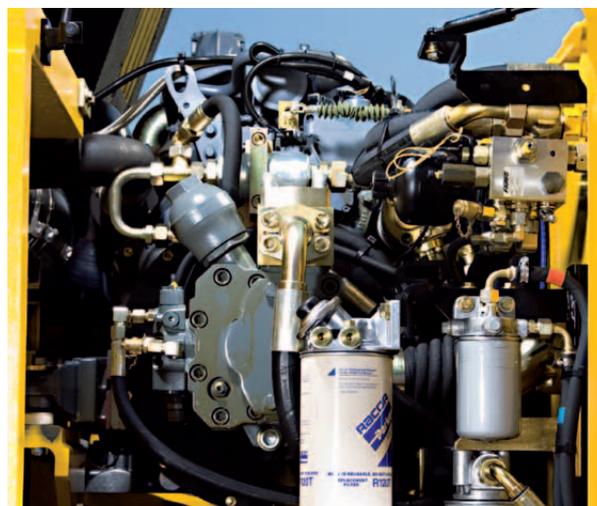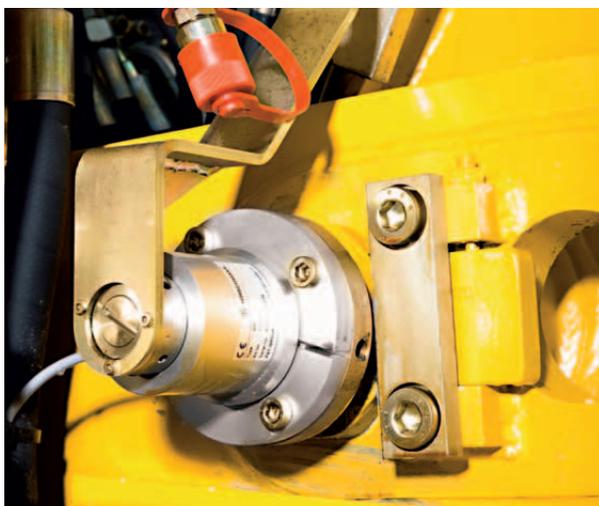

# RAIL-ROAD EXCAVATOR



## Electronic swing and height limitation

- Computer assisted swing limitation, which proportionally reduces the superstructure speed electronically when the limit is reached.
- Electronic height limitation eliminates the risk of the excavator boom from coming into contact with obstacles above such as power cables. The maximum articulating boom height, relative to the point of reference, is taken into account. The system recognises whether the clamshell or bucket are fitted and adjusts the programmed operating height accordingly. The motion stops when the programmed limit is reached.
- Swing and height limitation can be comfortably programmed from the operator's seat. It is not necessary to get out of the machine.

## Emergency de-railing

- Emergency de-railing is permanently available and doubly protected. Firstly by connecting the hydraulics to the cigarette lighter via an electric cable. Secondly by a fixed emergency hydraulic hand-pump.
- An electric emergency pump is available as an option.
- Emergency lowering of the rail bogie is permanently available.





## Superstructure - highlights

### Engine

## POWER

**Deutz turbo-charged engines provide fast and powerful motions, a powerful drive train, fast cycle times and dynamic development in performance.**

Outstanding engine characteristics:

- Exceptional power development from 1500 rpm.
- Turbo-charged with intercooler.
- Maintenance friendly filter change.
- High degree of comfort thanks to the low noise level.
- Low operating costs through exceptional fuel efficiency and low maintenance costs.
- Current emission standards are met.
- Option: automatic idle running. When the excavator is not working or moving, the engine speed automatically reduces and fuel consumption is lowered.

### Hydraulic system

## PRECISION CONTROL

- The rail-road excavators are fitted with well-proven load-sensing hydraulics. Our intelligent AWE 4 hydraulic management system allows simultaneous movements to be carried out irrespective of load. For more productivity and safe operations.
- The power you need, at the right time.  
For fast cycles or high lifting capacity: our load-sensing system attunes the method of operation of the excavator exactly to your application.  
For greater economy – you save fuel and maintenance costs.



### What you should also know

- Primary and secondary overload protection.
- Suction valves for all operating functions.
- Overload lock valves, precision lowering valves and travel brake valve.
- Pipe break protection valves for lifting cylinders. Optionally also on adjusting and articulating cylinders.
- Emergency steering and pressure reservoir for emergency lowering of the boom system.
- Proportional control of attachments by slider in joystick in the 1604ZW as standard.

# RAIL-ROAD EXCAVATOR



## Cab

# FAR-SIGHTEDNESS

**Our roomy two-man cab is the largest on the market and provides everything you need to work comfortably and efficiently.**

### The cab with more view

- Two-man cab with excellent all-round vision.
- Optimum lay-out of the controls provides clear view of the attachment.
- Optional: rear view monitoring with camera and display.

### Welcome to the “Feel-good” workplace

- The cab is very well isolated from vibrations.
- The sound pressure level is very low thanks to the high quality sound insulation.
- Air conditioning is standard including a defrosting function for fast de-misting and de-icing of the windscreen.
- The air-cushioned operator’s seat is individually adjustable in all movements. Backrest, lumbar support, cushion length and angle can all be easily adjusted.
- The narrow steering column gives excellent vision to the attachment and the rail bogie.





## Chassis - Highlights

# GUIDANCE FORCE

Numerous components ensure safe and strong contact between chassis and rail.

### Go into (rail) guidance mode

Our **CARSY system** (Computer assisted rail contact pressure system) **electronically ensures the optimum pressure on the rail is maintained continuously and automatically.**


- The required pressures are automatically set, continuously monitored and adjusted if necessary.
- The front and rear bogie wheels can be independently switched to permit simple de-railing and positive by-passing of rail points.
- Automatic self-diagnostics of the electronics.
- Available for 1404 ZW and 1604 ZW models.

### Operation at the optimum level

- Continuous self-levelling of the rail running gear ensures smooth movement of the rail-road excavator when travelling on rail.

### Optimum grip

- Bogie axle box with optimum oscillation in the axle mountings.  
The successful result: safe operation especially on uneven construction site tracks and in cornering.
- With the friction wheel model, traction is provided via a non-slip friction roller.

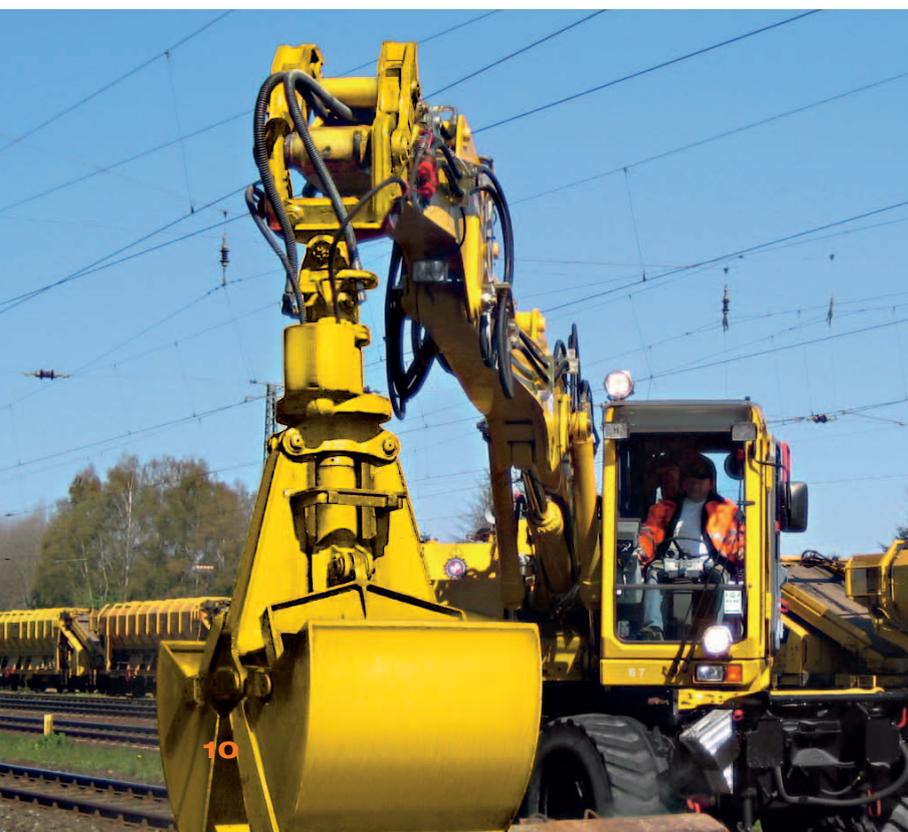

# RAIL-ROAD EXCAVATOR



## Stable

The low centre of gravity and our compact design guarantee high stability with excellent off-road mobility. 1604ZW also has a bilateral barrier on the track wheel cylinder at a swing of 5 ° from the longitudinal axis and at a standstill.

## First choice

The right chassis for any application: with or without outriggers with different track gauges and different wheelbases.

## Driving power

Whether in crawling speed or top speed – the high torque drives the excavator quickly and safely through any terrain, assisted by the well-proven traction characteristics of our tires. The sensitive power assisted steering on the oscillating axle transforms any rough terrain into a “straight road”. Even at high-speed road travel, the 04 series impresses through its road holding and thereby provides excellent handling characteristics. Further, 1604ZW has a traction increase at the push of a button that if needed increases the contact pressure of the drive wheels on the track by about 20%. The so-optimized driving leads to improved load starting.

The chassis incorporates robust, specially designed excavator axles with planetary drives in all 4 wheel hubs. All-wheel drive, a variable displacement motor (1604ZW with power shift transmission ) and a double-action brake valve are standard.

## Reliability - here we are playing it safe

- Tie-down lugs for fast and safe securing of the excavator for transport on rail or road.
- Steering axle with automatic oscillation lockout to allow travel with heavy loads in any terrain. Activation of the lockout either automatically when braking or manually.

## Other safety aspects

- Brakes: wet, maintenance-free multi-disc brake
- Excellent emergency steering characteristics





## Attachments-Highlights

# SELECTED

**All components are designed for high lifting capacity, optimum handling curves, fast working movements and travel speeds. The design advantages of our arms lie in our well proven welding methods. They are lighter while maintaining the same robustness.**

### Large choice - booms and sticks

Lifting capacities, ranges, breakout and ripping forces can be adjusted for the specific task through a wide selection of boom/stick combinations.

### Adjustable boom

Our variable adjustable booms, which can be extended and retracted hydraulically, provide for loading and reaching at great height.

### Sticks - specially developed for rail laying

Our special stick can be fully extended for maximum height of lift under the cat wire.

### Long-life cylinders

Every cylinder is designed for maximum power, taking the size of the machine into account. The high level of buckle resistance, the high-quality surface finish of the piston rod and special sealing systems all contribute to long service life.



## Equipment-Highlights

# PROFESSIONAL ATTACHMENTS

**Manufacture of both our standard and special attachments takes account of state-of-the-art developments in machine building and steel engineering. High-strength steels, proven technology and decades of experience result in work that is cost-effective and practice-based.**

### Buckets


All especially well worn parts are made of high-strength, hardened and tempered fine grained steel. The easy penetration is achieved through the fine cut based on the slightly conical shape of the bucket. The tooth holders are held particularly flat and are integrated into the cutting edge. This creates less digging resistance and enables more working cycles. We also have different teeth shapes for different types of ground.

### Grabs

The right grab for any job – the multifaceted palette includes devices with single or multiple cylinders as well as double or multiple shell models. The models are made up of graduated base types and a series of assigned shell sizes. All grab types are designed for maximum closing pressure and excellent filling performance. The grab rotating hydraulics are standard.

### Special attachments for use on rail


- Multi-functional rotator for bucket tools
- Short design double clamshells for digging between sleepers
- Short design gravel grab
- Sleeper replacer with hydraulic sleeper grab
- Mulcher
- Tamping attachment
- Keyhole shears/keyhole saw

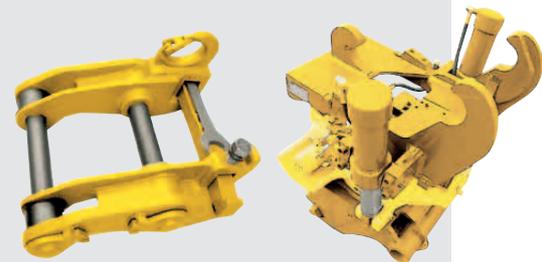

Optionally, all additional hydraulic attachments can be controlled by an easy to use pressure balance.

### The greatest flexibility - quick attach systems



Our quick attach systems give you the highest flexibility when selecting the required attachment. The simple and robust design of our mechanical and hydraulic quick attach system helps you retool with the least amount of effort in the shortest possible period of time.

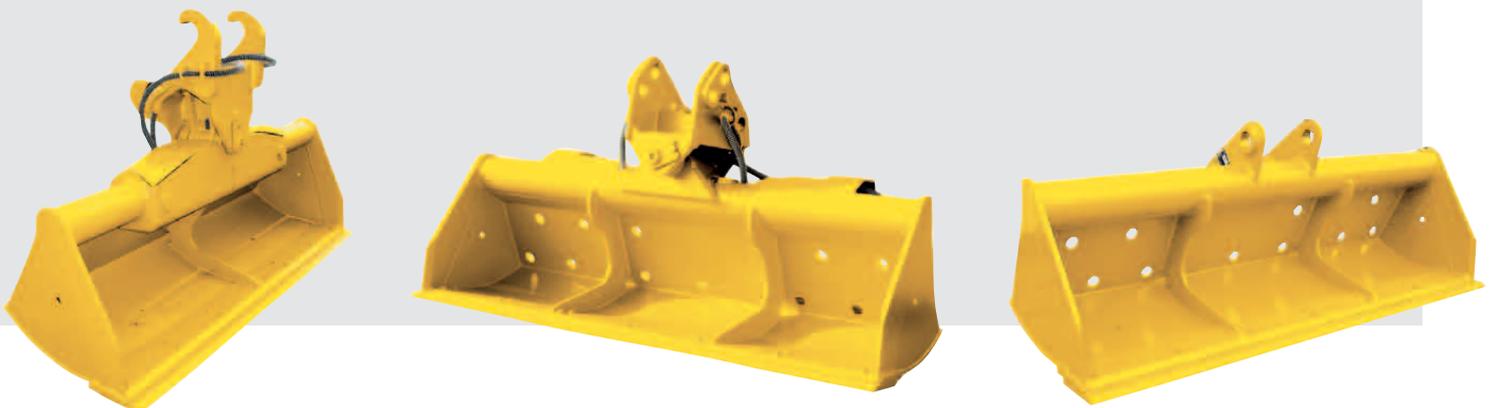

## Service and maintenance

# SIMPLICITY

Simple and convenient maintenance of the machine to preserve the residual value

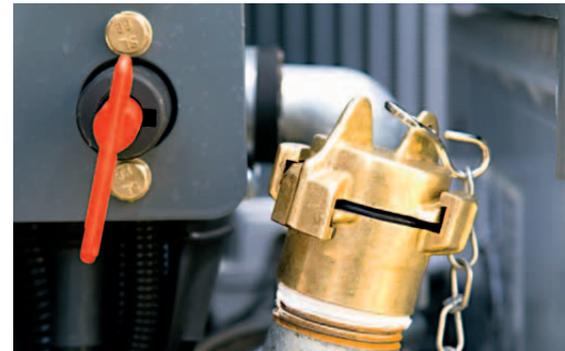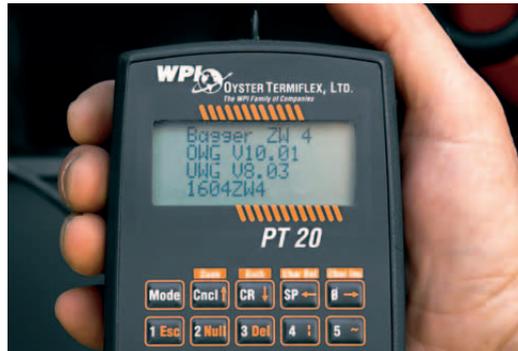

### Designed for ease of service

- Service-friendly maintenance flaps make work easier.
- All lubrication points for the rotating assembly and the arm equipment are consolidated.
- For oil monitoring all the main components are directly visible and, like the battery, easily accessible.
- To enable the machine to be quickly checked by our customer service technicians, monitoring points have been placed at all operationally relevant positions.
- Good maintenance: the CARSY system records operational data, which can be quickly and easily read by our service personnel.

### Expert service partners

Our dealers' customer service staff undergo intensive technical training at our works, so that they can provide you with expert advice whenever you need it.

### The hydraulic oil filter

The special process which we have adopted enables the filter basket to be repeatedly re-used. Only the 'lifetime' filter element needs to be changed. This is good for the environment and significantly reduces the costs of disposal.

### Long service life

Your Terex® Rail-road excavator has a long service life. Please make sure that servicing intervals are adhered to and original spare parts are used.






## Technical specification sheet road-rail excavator 1404ZW


### Main dimensions

Base machine A41.5 – with 4 outriggers

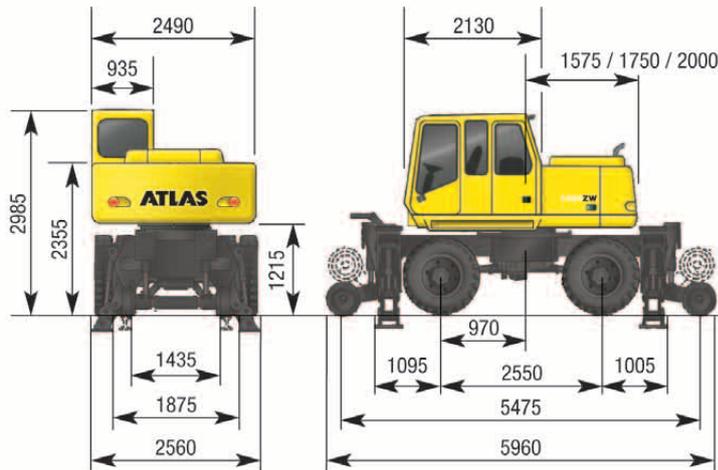

### Travel configuration with grab

Base machine A41.4 – without outriggers

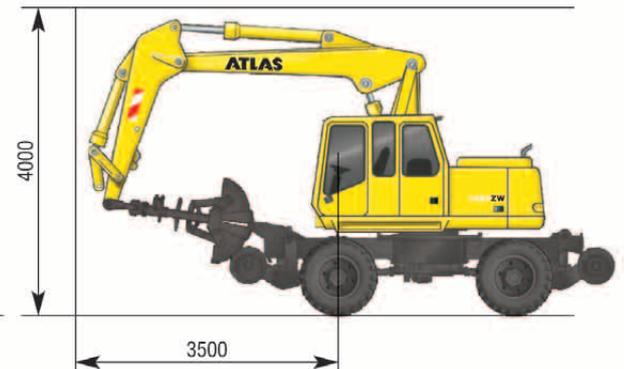

### Working equipment:

Base machine		Weight/kg	Standard equipment
A41.4	Rail-Road hydraulic excavator 1404 ZW, without outriggers, tailswing 1575 mm	13100	• Maintenance point for filtration system
A41.5	Rail-Road hydraulic excavator 1404 ZW, with 4 outriggers, tailswing 1575 mm	15500	• Hydraulic system for grab and grab rotation function
<b>Additional and special equipment</b>			• Tank indicator
B41.20	Heavy counterweight, tailswing 1750 mm	400	• Battery main switch in negative lead.
B41.21	Heavy counterweight, tailswing 2000 mm	1000	• "Travel" function via foot control
B41.39	Additional hydraulic unit for variable boom cylinder	20	• Accumulator for emergency lowering of boom system
B41.41	Hose-rupture safety device for lifting cylinder, overload warning device.	10	• Sliding window in cab door
B41.23	Two man fully glazed cab	300	• Windshield washer system
<b>Base section of arm and boom</b>			• Central lubrication
C53.41P	Base arm with two lift cylinders and an internally mounted operating cylinder	1090	• Tilt and height adjustable steering column
C53.46	Boom with articulating cylinder only for base arm C53.41P	930	• Radio pre-installation
<b>Sticks</b>			• Storage box in the cab
D41.22	Rail-road excavator stick, working length 2200 mm	490	• Comfort seat with armrests and lumbar support
<b>Bucket tipping cylinder</b>			• Toolbox on chassis
F53.1	Bucket tipping cylinder with reversing linkage	165	• Sealed pivot points in the base section of the boom
			• Boom and stick with 50 hour maintenance intervals
			• Securing lug for securing the grab during road travel
			• Air-conditioning
			• Air dryer for compressed air system
			• Narrow axles for underground and suburban railways
<b>Rail guidance</b>			
CARSY (Computer assisted rail contact pressure system). Automatic system for regulating and monitoring the force of the rail guide wheels. The required pressures are automatically set, continuously monitored and adjusted if necessary. Depending on the pre-selected operating condition, each separate guidance bogie wheel is set to a different pressure in accordance with a prescribed schedule, locked or hydraulically trailed.			The front and rear bogie wheels can be independently switched to permit simple de-railing and positive crossing of rail points.
			Automatic self-diagnosis of the electronic system. Emergency function: de-railing is assured even in the event of a fault or complete breakdown.
			Track gauge 1435 mm, other widths on request.

# RAIL-ROAD EXCAVATOR

## Technical specification sheet road-rail excavator 1404ZW

### Engine

Power rating acc. to ISO 1585	74.9 kW (102 HP)
Effective output locked	69 kW (94 HP)
Manufacturer	Deutz
Type	BF4M 2012
Displacement	4000 cm <sup>3</sup>
Rotational speed	2100 rpm
Design	Turbocharger/charge-air cooling

### Hydraulic system

Computer controlled AWE4 system with a load limiting high performance piston pump and fuel efficient on-demand power control for sensitive, proportional and load independent ramp-up of all operational movements • Primary and secondary protection of the hydraulic system against overload • Suction valve for all operational functions as well as restrictors in the lift and articulating circuits • Fine lowering and load-retaining valve in the lifting circuit.

Hydraulic system	1 x AKP
Main pump	HPR 105
Max. flow variable capacity pump	220 l/min
Max. operating pressure for operating movements	340 bar

### Noise level

Noise level\* is significantly below EC limits

Ambience level (L <sub>vA</sub> )	98 dB (A)
Cab level (L <sub>pA</sub> )	75 dB (A)

\*Dynamic sound level measurement according to 2000/14 EC

### Electrical system

Operating voltage	24 Volt
Cold-start heavy duty battery	2 x 100 Ah
Electrical system in compliance with StVZO (Regulations Authorizing the Use of Vehicles for Road Traffic in Germany) and European standard	

### Brakes

Service brake	pneumatic-hydraulically actuated drum brake
Parking brake	pneumatically-operated spring-loaded parking brake

Emergency brake for use on rail	
Max. un-braked trailer load	40 t
Max. trailer load with wagon brake	120 t

### Fluid capacities

Fuel tank	190 l
Hydraulic tank	200 l
Engine oil	10 l

### Cab

Flexibly mounted • Heat absorbing extra wide windscreen for all-round vision • Glare-free interior • Ergonomic pilot control levers • Adjustable steering column • Lengthways adjustment of the seat independent of the control console • Front windscreen slidable under the cab roof • Second seat for mate

Type	Terex 935 two-man comfort cab
Overall length	2130 mm
Width	935 mm

### Swing assembly

Swing motor	axial piston motor with priority valve
Swing gear	planetary reduction
Swing brake*	multi-disc brake
Drive via an internally toothed swing bearing	
Swing speed	8.5 rpm
Swing torque	37.5 kNm

\* simple swinging on slopes against the incline is assured, with locking foot pedal when slewing pressure of 120 bar is exceeded.

### Power Transmission

40 t special excavator axles with planetary drives to all four wheel hubs

- All-wheel drive • Variable drive engine • Double acting travel brake valve
- Travel direction selector with steering column mounted lever or switch on pilot control lever • Steering axle with automatic oscillation lock
- Travel controls via foot pedal valve

### Travel speed

Road and rail operation	
Creep speed	max. 1.0 km/hour
Off-road speed	max. 5.0 km/hour
Highway speed	max. 20 km/hour
Rail guidance, track gauge 1435 mm, other widths on request	

### Tires

8 x	10.00 - 20
(inner tire - highway, outer tire - off highway tread pattern)	


### Weight

Operating weight	17.0 - 20.0 t
------------------	---------------



## Technical specification sheet road-rail excavator 1404ZW


### Working range grab

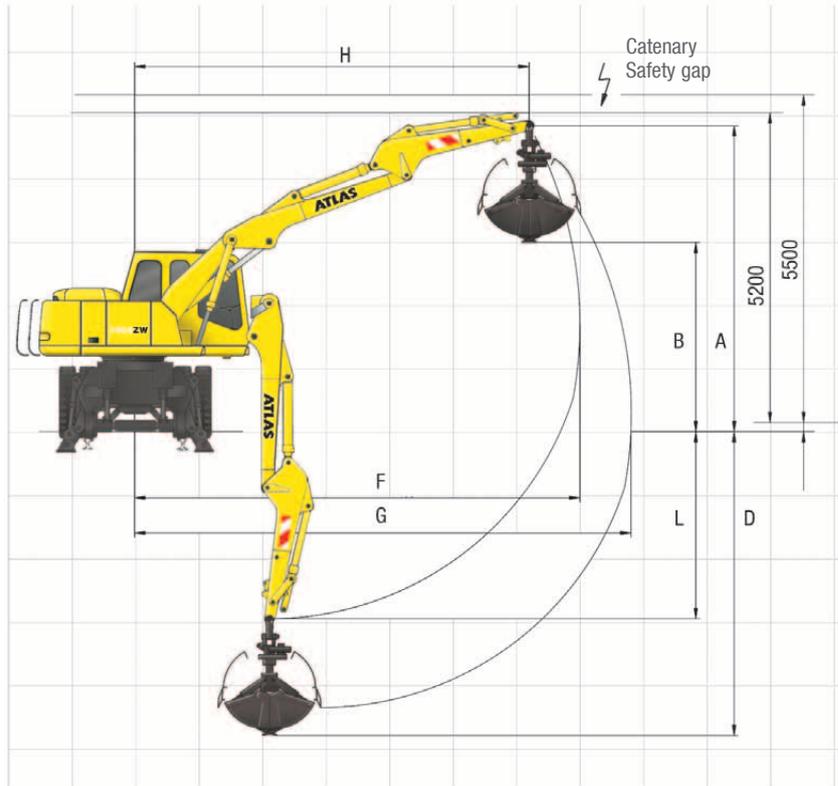

#### Stick D41.22, working length 2200 mm

Equipment: A41.5, C53.41P, C53.46, D41.22, F31, E332, E344		Grab
A	Height of stick	mm 4980
B	Discharge height	mm 3020
D	Max digging depth	mm 5170
F	Max. radius	mm 7400
G	Max. reach	mm 8250
H	Max. arm position	mm 6605
J	Max. reach height	mm -
L	Bucket pivot point	mm 3205
Grab	l	350
	Grab clamping force	kN 73.0
	Operating weight	t 19.3

### Working range bucket

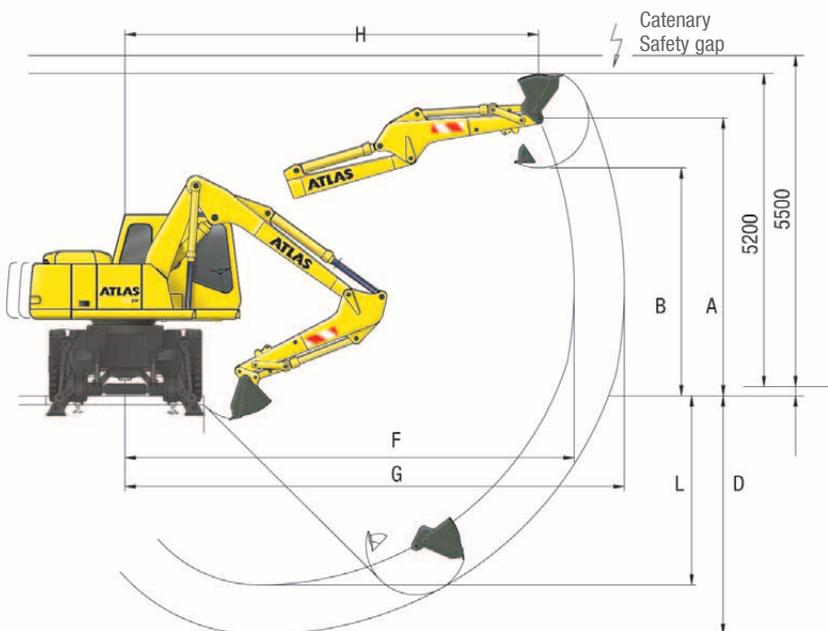

#### Stick D41.22, working length 2200 mm

Equipment: A41.5, C53.41P, C53.46, D41.22, F53.1, G649		Bucket
A	Height of stick	mm 4465
B	Discharge height	mm 3715
D	Max digging depth	mm 4300
F	Max. radius	mm 7400
G	Max. reach	mm 8495
H	Max. arm position	mm 6850
J	Max. reach height	mm 5200
L	Bucket pivot point	mm 3205
Bucket	l	700
	Stick digging force	kN 82
	Bucket digging force	kN 130
	Operating weight	t 19.0

# RAIL-ROAD EXCAVATOR

## Technical specification sheet road-rail excavator 1404ZW

Base machine A41.5, C53.41P, C53.46, D41.22

### Tailswing 1750 mm 4 outriggers

Hook height m		3.0 m		4.0 m		5.0 m		6.0 m		7.0 m	
		l	q	l	q	l	q	l	q	l	q
5	a	-	-	5.3	5.3	5.4	4.6	4.9	3.4	-	-
	b	-	-	5.3	4.0	5.4	2.9	4.9	2.2	-	-
4	a	-	-	6.6	6.3	5.6	4.6	4.9	3.5	3.8	2.6
	b	-	-	6.6	3.9	5.6	2.9	4.9	2.2	3.8	1.6
3	a	-	-	7.5	6.1	6.0	4.5	5.1	3.5	4.6	2.6
	b	-	-	7.5	3.8	6.0	2.8	5.1	2.2	4.6	1.6
1	a	10.5	8.6	8.5	6.1	6.6	4.4	5.4	3.3	4.6	2.6
	b	10.5	4.9	8.5	3.7	6.6	2.8	5.4	2.1	4.6	1.5
0	a	11.6	8.4	8.5	5.9	6.6	4.3	5.4	3.2	4.2	2.5
	b	11.6	4.6	8.5	3.6	6.6	2.8	5.4	2.0	4.2	1.5
-1	a	12.1	8.2	8.6	5.8	6.7	4.2	5.4	3.2	-	-
	b	12.1	4.5	8.6	3.4	6.7	2.6	5.4	1.9	-	-
-2	a	12.4	8.1	8.9	5.7	6.6	4.1	-	-	-	-
	b	12.4	4.4	8.9	3.4	6.6	2.4	-	-	-	-

### Tailswing 1750 mm no outriggers

Hook height m		3.0 m		4.0 m		5.0 m		6.0 m		7.0 m	
		l	q	l	q	l	q	l	q	l	q
5	a	-	-	5.3	4.7	5.4	3.4	4.2	2.5	-	-
	b	-	-	5.3	3.6	5.4	2.6	4.9	1.9	-	-
4	a	-	-	6.6	4.6	5.6	3.4	4.3	2.6	3.2	1.9
	b	-	-	6.6	3.5	5.6	2.6	4.9	1.9	3.8	1.4
3	a	-	-	7.5	4.5	5.5	3.3	4.3	2.5	3.2	1.9
	b	-	-	7.5	3.4	6.0	2.5	5.1	1.9	4.6	1.4
1	a	10.5	6.7	7.6	4.4	5.5	3.3	4.1	2.4	3.1	1.8
	b	10.5	4.8	8.5	3.3	6.6	2.4	5.4	1.8	4.6	1.3
0	a	11.6	6.4	7.7	4.3	5.4	3.1	4.0	2.3	3.1	1.8
	b	11.6	4.6	8.5	3.1	6.6	2.3	5.4	1.7	4.2	1.3
-1	a	12.1	6.2	7.7	4.1	5.3	3.0	3.9	2.3	-	-
	b	12.1	4.4	8.6	3.0	6.7	2.2	5.4	1.6	-	-
-2	a	12.4	6.1	7.6	4.1	5.2	2.9	-	-	-	-
	b	12.4	4.3	8.9	3.0	6.6	2.1	-	-	-	-

### Tailswing 2000 mm 4 outriggers

Hook height m		3.0 m		4.0 m		5.0 m		6.0 m		7.0 m	
		l	q	l	q	l	q	l	q	l	q
5	a	-	-	5.3	5.3	5.4	5.0	4.9	3.8	-	-
	b	-	-	5.3	4.4	5.4	3.2	4.9	2.4	-	-
4	a	-	-	6.6	6.6	5.6	4.9	4.9	3.8	3.8	2.9
	b	-	-	6.6	4.3	5.6	3.2	4.9	2.5	3.8	1.8
3	a	-	-	7.5	6.6	6.0	4.9	5.1	3.8	4.6	2.9
	b	-	-	7.5	4.2	6.0	3.2	5.1	2.4	4.6	1.8
1	a	10.5	9.9	8.5	6.5	6.6	4.8	5.4	3.7	4.6	2.8
	b	10.5	6.0	8.5	4.1	6.6	3.1	5.4	2.3	4.6	1.8
0	a	11.6	9.9	8.5	6.5	6.6	4.7	5.4	3.6	4.2	2.8
	b	11.6	5.8	8.5	4.0	6.6	3.0	5.4	2.2	4.2	1.7
-1	a	12.1	9.7	8.6	6.3	6.7	4.6	5.4	3.5	-	-
	b	12.1	5.6	8.6	3.9	6.7	2.9	5.4	2.2	-	-
-2	a	12.4	9.7	8.9	6.3	6.6	4.5	-	-	-	-
	b	12.4	5.6	8.9	3.8	6.6	2.8	-	-	-	-

### Tailswing 2000 mm no outriggers

Hook height m		3.0 m		4.0 m		5.0 m		6.0 m		7.0 m	
		l	q	l	q	l	q	l	q	l	q
5	a	-	-	5.3	5.2	5.4	3.8	4.6	2.8	-	-
	b	-	-	5.3	4.0	5.4	2.9	4.9	2.2	-	-
4	a	-	-	6.6	5.1	5.6	3.7	4.6	2.9	3.5	2.1
	b	-	-	6.6	3.9	5.6	2.9	4.9	2.2	3.8	1.6
3	a	-	-	7.5	5.0	5.9	3.7	4.6	2.8	3.5	2.1
	b	-	-	7.5	3.8	6.0	2.8	5.1	2.2	4.6	1.6
1	a	10.5	7.4	8.2	4.9	5.9	3.6	4.5	2.7	3.5	2.1
	b	10.5	5.4	8.5	3.7	6.6	2.8	5.4	2.1	4.6	1.5
0	a	11.6	7.1	8.2	4.8	6.0	3.5	4.4	2.6	3.4	2.0
	b	11.6	5.2	8.5	3.6	6.6	2.7	5.4	2.0	4.2	1.5
-1	a	12.1	6.9	8.3	4.6	5.9	3.4	4.3	2.0	-	-
	b	12.1	5.0	8.6	3.4	6.7	2.6	5.4	1.9	-	-
-2	a	12.4	6.9	8.3	4.6	5.7	3.3	-	-	-	-
	b	12.4	5.0	8.9	3.4	6.6	2.5	-	-	-	-

a = auf der Straße verfahrbar, b = auf der Schiene verfahrbar, q = quer, l = längs

All values in tonnes (t) were determined acc. to ISO 10567 and include a stability factor of 1.33 or 87% of the hydraulic lifting capacity. These values are applicable at the top of the arm with optimum positioning of the corresponding boom system.

### Operating weights, tailswing

Type	Configuration	Operating weight with boom adjusting mechanism	Tailswing mm
1404 ZW	A41.4	16.6 t	1575
1404 ZW	A41.4	17.0 t	1750
1404 ZW	A41.4	17.6 t	2000
1404 ZW, 4 outriggers	A41.5	19.0 t	1575
1404 ZW, 4 outriggers	A41.5	19.4 t	1750
1404 ZW, 4 outriggers	A41.5	20.0 t	2000

### Approvals

The equipment marked \* is an essential requirement of the German Federal Railways for operation on their network. The safety testing is conducted by the health and safety executive (Berufsgenossenschaft), compliance with the appropriate regulations is verified by the German Federal Railways and the TÜV.

### Additional and special equipment

- Short tailswing version (1575, 1750, 2000 mm tailswing)\*
- Two-man cab\*
- Auxiliary heating
- Narrow axles for underground and suburban railways
- Combined check point for ease of filter maintenance
- Hose-rupture safety device for lifting operation, overload warning device\*
- Trailer hitch on chassis\*
- Emergency manual hydraulic pump\*
- Special tow bar\*
- German Federal Railways approved lights\*
- Lift limitation electronically adjustable from the cab\*
- Swing limitation adjustable from the cab\*
- Wagon brake unit with footplate brake valve, permitted trailer load is 120 t
- Factory Federal German Railways approval with appropriate certification and all necessary accessories: fire extinguisher, first aid kit, earth cable, red/white flag, torch with red dimmable light, loud hailer, digital speed measurement instrument, oil spill tarpaulin and oil binder\*
- Rotating beacons
- Working floodlight(s)
- Radio/CD/MP3, front AUX in, USB
- Refueling pump
- Rail bogie with track gauges of up to approx. 1700 mm
- TÜV-approval

Items marked with \* are a requirement for Federal German Railway approval


## Technical specification sheet rail-road excavator / friction wheel 1404ZW

### Main dimensions

Base machine A41.4S

### Travel setup with grab

Base machine A41.4S

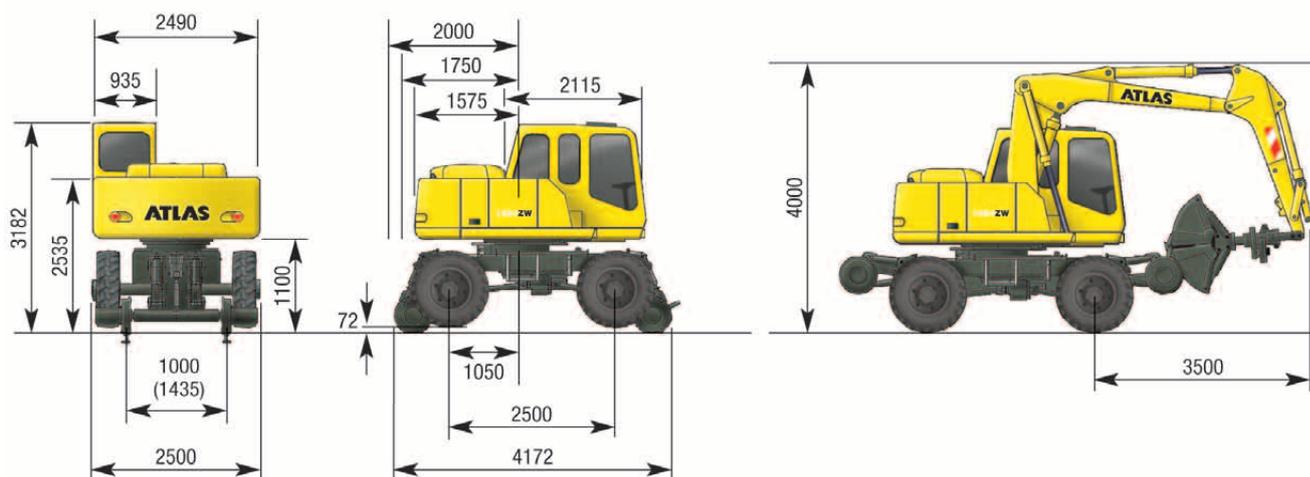

### Working equipment:

Base machine	Weight/kg	Standard equipment
A41.4S Rail-road hydraulic excavator 1404 ZW, with 1000 mm track gauge, tailswing 1575 mm	13100	<ul style="list-style-type: none"> <li>Maintenance point for filtration system</li> </ul>
<b>Additional and special equipment</b>		<ul style="list-style-type: none"> <li>Hydraulic system for grab and grab rotation function</li> </ul>
B41.20 Heavy counterweight, tailswing 1750 mm	400	<ul style="list-style-type: none"> <li>Tank indicator</li> </ul>
B41.21 Heavy counterweight, tailswing 2000 mm	1000	<ul style="list-style-type: none"> <li>Battery main switch in negative lead.</li> </ul>
B41.39 Additional hydraulic unit for variable boom cylinder	20	<ul style="list-style-type: none"> <li>"Travel" function via foot control</li> </ul>
B41.41 Hose-rupture safety device for lifting cylinder, overload warning device.	10	<ul style="list-style-type: none"> <li>Accumulator for emergency lowering of boom system</li> </ul>
B41.23 Two-man fully glazed cab 6032281 Conversion kit 1435 mm track gauge	300	<ul style="list-style-type: none"> <li>Sliding window in cab door.</li> </ul>
<b>Base section of arm and boom</b>		<ul style="list-style-type: none"> <li>Windshield washer system</li> </ul>
C53.41P Base arm with two lift cylinders and an internally mounted operating cylinder	1090	<ul style="list-style-type: none"> <li>Central lubrication</li> </ul>
C53.46 Boom with articulating cylinder only for base arm C53.41P	930	<ul style="list-style-type: none"> <li>Tilt and height adjustable steering column</li> </ul>
<b>Sticks</b>		<ul style="list-style-type: none"> <li>Preparation for radio installation</li> </ul>
D41.22 Rail-road excavator stick, working length 2200 mm	490	<ul style="list-style-type: none"> <li>Storage box in the cab</li> </ul>
<b>Bucket tipping cylinder</b>		<ul style="list-style-type: none"> <li>Air-cushioned comfort seat with armrests and lumbar support</li> </ul>
F53.1 Bucket tipping cylinder with reversing linkage	165	<ul style="list-style-type: none"> <li>Toolbox on chassis</li> </ul>
		<ul style="list-style-type: none"> <li>Sealed pivot points in the base section of the boom</li> </ul>
		<ul style="list-style-type: none"> <li>Boom and stick with 50 hour maintenance intervals</li> </ul>
		<ul style="list-style-type: none"> <li>Securing lug for securing the grab during road travel</li> </ul>
		<ul style="list-style-type: none"> <li>Air-conditioning</li> </ul>
		<ul style="list-style-type: none"> <li>Air dryer for compressed air system</li> </ul>
		<ul style="list-style-type: none"> <li>Narrow axles for underground and suburban railways</li> </ul>
<b>Rail guidance</b>		
<p>Four separate rail guidance wheels drive by a friction wheel activated by 4 hydraulic cylinders with appropriate safety equipment. During rail travel the chassis is lifted so rail points (Indusi) are not damaged when crossing. Greater loads can be picked up laterally to the direction of travel by lowering the chassis onto the sleeper heads. All movements can be controlled from the cab. An adapter allows the excavator to work on other track gauges.</p>		

# RAIL-ROAD EXCAVATOR

## Technical specification sheet rail-road excavator / friction wheel 1404ZW

### Engine

Power rating acc. to ISO 1585	74.9 kW (102 HP)
Effective output locked	69 kW (94 HP)
Manufacturer	Deutz
Type	BF4M 2012
Displacement	4000 cm <sup>3</sup>
Rotational speed	2100 rpm
Design	Turbocharger/charge-air cooling

### Hydraulic system

Computer controlled AWE4 system with a load limiting high performance piston-pump and fuel efficient on-demand power control for sensitive, proportional and load independent ramp-up of all operational movements • Primary and secondary protection of the hydraulic system against overload • Suction valve for all operational functions as well as restrictors in the lift and articulating circuits • Fine lowering and load-retaining valve in the lifting circuit.

Hydraulic system	1 x AKP
Main pump	HPR 105
Max. flow variable capacity pump	220 l/min
Max. operating pressure for operating movements	340 bar

### Noise level

Noise level\* is significantly below EC limits

Ambience level (L <sub>w</sub> A)	98 dB (A)
Cab level (L <sub>p</sub> A)	75 dB (A)

\*Dynamic sound level measurement according to 2000/14 EC

### Electrical system

Operating voltage	24 Volt
Cold-start heavy duty battery	2 x 100 Ah
Electrical system in compliance with StVZO (Regulations Authorizing the Use of Vehicles for Road Traffic in Germany) and European standard	

### Brakes

Service brake	pneumatic-hydraulically actuated drum brake
Parking brake	pneumatically-operated spring-loaded parking brake

Emergency brake for use on rail	
Max. un-braked trailer load	40 t
Max. trailer load with wagon brake	120 t

### Fluid capacities

Fuel tank	190 l
Hydraulic tank	200 l
Engine oil	10 l

### Cab

Flexibly mounted • Heat absorbing extra wide windscreen for all-round vision • Glare-free interior • Ergonomic pilot control levers • Adjustable steering column • Lengthways adjustment of the seat independent of the control console • Front windscreen stowable under the cab roof • Second seat for mate

Type	Terex 935 two-man comfort cab
Overall length	2130 mm
Width	935 mm

### Swing assembly

Swing motor	axial piston motor with priority valve
Swing gear	planetary reduction
Swing brake*	multi-disc brake
Drive via an internally toothed swing bearing	
Swing speed	8.5 rpm
Swing torque	37.5 kNm

\* simple swinging on slopes against the incline is assured, with locking foot pedal when slewing pressure of 120 bar is exceeded.

### Power Transmission

40 t special excavator axles with planetary drives to all four wheel hubs

- All-wheel drive • Variable drive engine • Double acting travel brake valve
- Travel direction selector with steering column mounted lever or switch on pilot control lever • Steering axle with automatic oscillation lock
- Travel controls via foot pedal valve

### Travel speed

Road and rail operation	Road	Rail
Crawling speed	0 - 1.3 km/hour	0 - 3.5 km/hour
Off-road speed	0 - 5.6 km/hour	0 - 10.9 km/hour
Highway speed	0 - 20 km/hour	0 - 40 km/hour

### Tires


4 x (Tread: Titan)	12.00 - 20
-----------------------	------------

### Weight

Operating weight	16.5 - 17.5 t
------------------	---------------

## Technical specification sheet road-rail excavator / friction wheel 1404ZW


### Working range grab

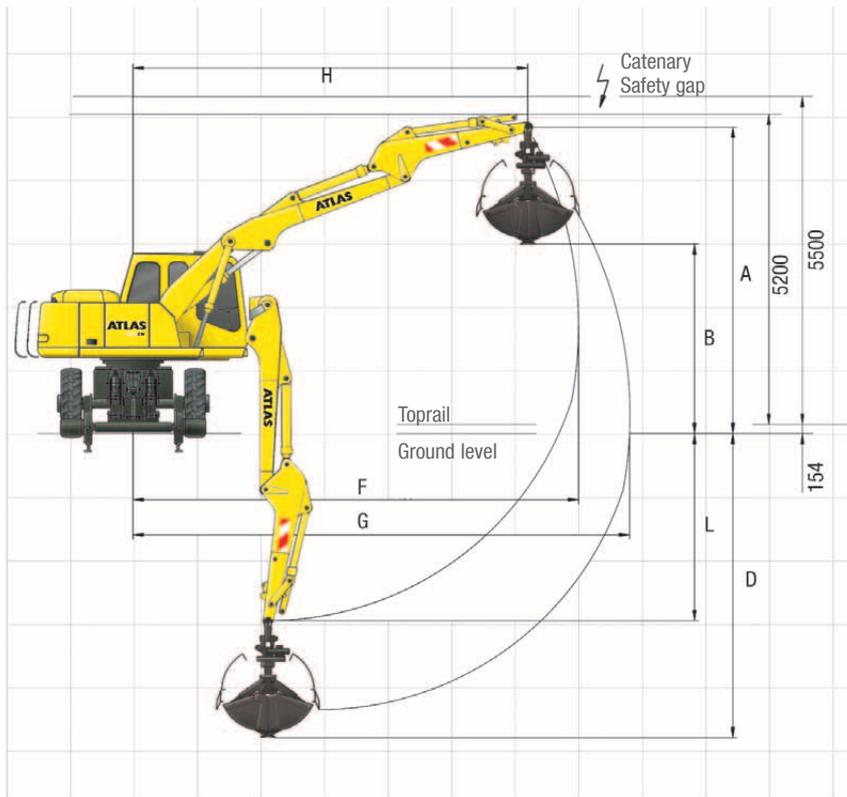

#### Stick D41.22 - working length 2200 mm

Equipment:	A41.4S, C53.41P, C53.46, D41.22, F31, E332, E344	Grab
A	Height of stick	mm 5140
B	Discharge height	mm 3180
D	Max. digging depth	mm 5100
F	Max. radius	mm 7400
G	Max. reach	mm 8250
H	Max. arm position	mm 6560
J	Max. reach height	mm -
L	Bucket pivot point	mm -
Grab	l	350
Grab clamping force	kN	73.0
Operating weight	t	18.0

### Working range bucket

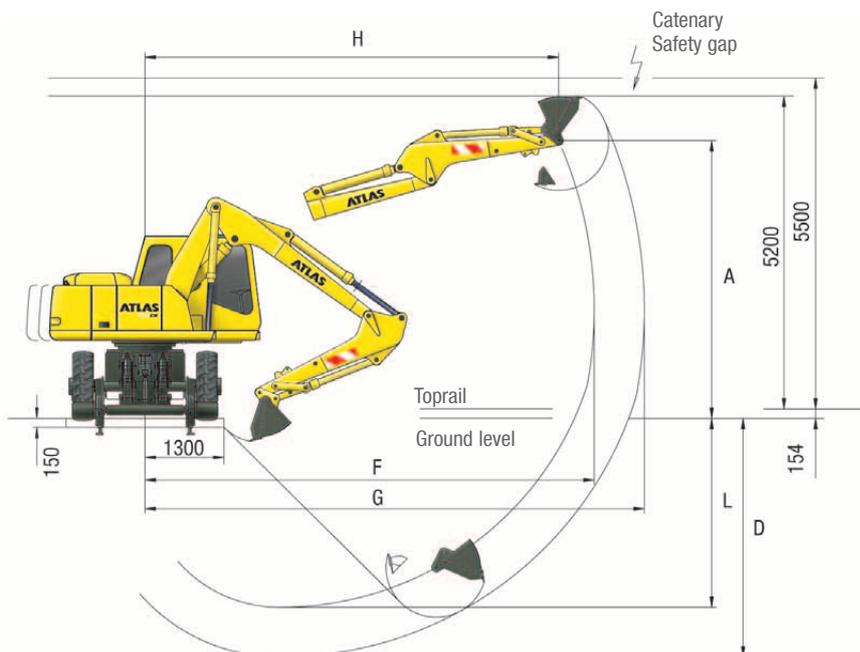

#### Stick D41.22 - working length 2200 mm

Equipment:	A41.5, C53.41P, C53.46, D41.22, F53.1, G649	Bucket
A	Height of stick	mm 4615
B	Discharge height	mm -
D	Max. digging depth	mm 3965
F	Max. radius	mm 7400
G	Max. reach	mm 8225
H	Max. arm position	mm 6815
J	Max. reach height	mm -
L	Bucket pivot point	mm 3140
Bucket	l	700
Stick digging force	kN	82
Bucket digging force	kN	130
Operating weight	t	17.8

# RAIL-ROAD EXCAVATOR

## Technical specification sheet road-rail excavator / friction wheel 1404ZW

### Tailswing 1750 mm 1000 mm track gauge

Hook height m		3.0 m		3.5 m		4.0 m		5.0 m		6.0 m		7.0 m	
		l	q	l	q	l	q	l	q	l	q	l	q
		5	a	-	-	-	-	5.3	4.7	5.4	3.4	4.2	2.5
	b	-	-	-	-	5.3	2.6	5.4	1.9	4.7	1.3	-	-
4	a	-	-	7.6	5.4	7.5	4.5	5.5	3.3	4.3	2.5	3.2	1.9
	b	-	-	7.6	2.8	7.5	2.4	6.0	1.8	4.7	1.3	3.6	0.9
3	a	8.7	6.7	8.4	5.3	7.6	4.4	5.5	3.3	4.2	2.5	3.2	1.9
	b	8.7	3.3	8.4	2.7	8.0	2.3	6.0	1.8	4.7	1.3	3.6	0.9
1	a	10.5	6.7	9.4	5.3	7.6	4.4	5.5	3.3	4.1	2.4	3.1	1.8
	b	10.5	3.3	9.6	2.7	8.2	2.3	6.0	1.7	4.6	1.2	3.6	0.8
0	a	11.6	6.4	9.5	5.1	7.7	4.3	5.4	3.1	4.0	2.3	3.1	1.8
	b	11.6	3.1	10.0	2.5	8.3	2.2	6.0	1.6	4.5	1.1	3.5	0.8
-1	a	12.1	6.2	9.7	5.0	7.7	4.1	5.3	3.0	3.9	2.3	-	-
	b	12.1	2.9	10.1	2.4	8.4	2.0	6.0	1.5	4.4	1.1	-	-
-2	a	12.4	6.1	9.6	4.9	7.6	4.1	5.2	2.9	-	-	-	-
	b	12.4	2.8	10.3	2.3	8.4	2.0	5.8	1.4	-	-	-	-

### Tailswing 2000 mm 1000 mm track gauge

Hook height m		3.0 m		3.5 m		4.0 m		5.0 m		6.0 m		7.0 m	
		l	q	l	q	l	q	l	q	l	q	l	q
		5	a	-	-	-	-	5.3	5.2	5.4	3.8	4.6	2.8
	b	-	-	-	-	5.3	2.9	5.4	2.2	4.9	1.6	-	-
4	a	-	-	7.6	6.0	7.5	5.0	5.9	3.7	4.6	2.8	3.5	2.1
	b	-	-	7.6	3.2	7.5	2.7	6.0	2.1	5.0	1.6	3.9	1.1
3	a	8.7	7.4	8.4	5.9	8.0	4.9	5.9	3.7	4.6	2.8	3.5	2.1
	b	8.7	3.8	8.4	3.1	8.0	2.7	6.4	2.0	5.0	1.5	3.9	1.1
1	a	10.5	7.4	9.6	5.9	8.2	4.9	5.9	3.6	4.5	2.7	3.5	2.1
	b	10.5	3.8	9.6	3.1	8.5	2.7	6.3	2.0	5.0	1.5	3.9	1.1
0	a	11.6	7.1	10.0	5.7	8.2	4.8	6.0	3.5	4.4	2.6	3.4	2.0
	b	11.6	3.6	10.0	3.0	8.5	2.5	6.4	1.9	4.9	1.4	3.8	1.0
-1	a	12.1	6.9	10.1	5.6	8.3	4.6	5.9	3.4	4.3	2.6	-	-
	b	12.1	3.4	10.1	2.8	8.6	2.4	6.5	1.8	4.8	1.3	-	-
-2	a	12.4	6.9	10.3	5.5	8.3	4.6	5.7	3.3	-	-	-	-
	b	12.4	3.4	10.3	2.8	8.9	2.4	6.3	1.7	-	-	-	-

### Tailswing 1750 mm 1435 mm track gauge

Hook height m		3.0 m		3.5 m		4.0 m		5.0 m		6.0 m		7.0 m	
		l	q	l	q	l	q	l	q	l	q	l	q
		5	a	-	-	-	-	5.3	4.7	5.4	3.4	4.2	2.5
	b	-	-	-	-	5.3	3.6	5.4	2.6	4.7	1.9	-	-
4	a	-	-	7.6	5.4	7.5	4.5	5.5	3.3	4.3	2.5	3.2	1.9
	b	-	-	7.6	4.0	7.5	3.4	6.0	2.5	4.7	1.9	3.6	1.4
3	a	8.7	6.7	8.4	5.3	7.6	4.4	5.5	3.3	4.2	2.5	3.2	1.9
	b	8.7	4.8	8.4	3.9	8.0	3.3	6.0	2.5	4.7	1.9	3.6	1.4
1	a	10.5	6.7	9.4	5.3	7.6	4.4	5.5	3.3	4.1	2.4	3.1	1.8
	b	10.5	4.8	9.6	3.9	8.2	3.3	6.0	2.4	4.6	1.8	3.6	1.3
0	a	11.6	6.4	9.5	5.1	7.7	4.3	5.4	3.1	4.0	2.3	3.1	1.8
	b	11.6	4.6	10.0	3.7	8.3	3.1	6.0	2.3	4.5	1.7	3.5	1.3
-1	a	12.1	6.2	9.7	5.0	7.7	4.1	5.3	3.0	3.9	2.3	-	-
	b	12.1	4.4	10.1	3.6	8.4	3.0	6.0	2.2	4.4	1.6	-	-
-2	a	12.4	6.1	9.6	4.9	7.6	4.1	5.2	2.9	-	-	-	-
	b	12.4	4.3	10.3	3.5	8.4	3.0	5.8	2.1	-	-	-	-

### Tailswing 2000 mm 1435 mm track gauge

Hook height m		3.0 m		3.5 m		4.0 m		5.0 m		6.0 m		7.0 m	
		l	q	l	q	l	q	l	q	l	q	l	q
		5	a	-	-	-	-	5.3	5.2	5.4	3.8	4.6	2.8
	b	-	-	-	-	5.3	4.0	5.4	2.9	4.9	2.2	-	-
4	a	-	-	7.6	6.0	7.5	5.0	5.9	3.7	4.6	2.8	3.5	2.1
	b	-	-	7.6	4.5	7.5	3.8	6.0	2.8	5.0	2.2	3.9	1.6
3	a	8.7	7.4	8.4	5.9	8.0	4.9	5.9	3.7	4.6	2.8	3.5	2.1
	b	8.7	5.4	8.4	4.4	8.0	3.7	6.4	2.8	5.0	2.1	3.9	1.6
1	a	10.5	7.4	9.6	5.9	8.2	4.9	5.9	3.6	4.5	2.7	3.5	2.1
	b	10.5	5.4	9.6	4.4	8.5	3.8	6.3	2.8	5.0	2.1	3.9	1.5
0	a	11.6	7.1	10.0	5.7	8.2	4.8	6.0	3.5	4.4	2.6	3.4	2.0
	b	11.6	5.2	10.0	4.2	8.5	3.6	6.4	2.7	4.9	2.0	3.8	1.5
-1	a	12.1	6.9	10.1	5.6	8.3	4.6	5.9	3.4	4.3	2.6	-	-
	b	12.1	5.0	10.1	4.1	8.6	3.4	6.5	2.6	4.8	1.9	-	-
-2	a	12.4	6.9	10.3	5.5	8.3	4.6	5.7	3.3	-	-	-	-
	b	12.4	5.0	10.3	4.0	8.9	3.4	6.3	2.5	-	-	-	-

a = travel on road permitted, b = travel on rail permitted, q = lateral, l = longitudinal

All values in tonnes (t) were determined acc. to ISO 10567 and include a stability factor of 1.33 or 87% of the hydraulic lifting capacity. These values are applicable at the top of the arm with optimum positioning of the corresponding boom system.

### Operating weights, tailswing

Type	Configuration	Operating weight with boom adjusting mechanism	Tailswing mm
1404 ZW	A41.4S	16.5 t	1575
1404 ZW	A41.4S	16.9 t	1750
1404 ZW	A41.4S	17.5 t	2000

### Approvals

The equipment marked \* is an essential requirement of the German Federal Railways for operation on their network. The safety testing is conducted by the health and safety executive (Berufsgenossenschaft), compliance with the appropriate regulations is verified by the German Federal Railways and the TÜV.


### Additional and special equipment

- Short tailswing version (1575, 1750, 2000 mm tailswing)\*
- Two-man cab\*
- Auxiliary heating
- Hose-rupture safety device for lifting operation, overload warning device\*
- Trailer hitch on chassis\*
- Emergency manual hydraulic pump\*
- Special tow bar\*
- German Federal Railways approved lights\*
- Lift limitation electronically adjustable from the cab\*
- Swing limitation adjustable from the cab\*
- Wagon brake unit with footplate brake valve, permitted trailer load is 120 t
- Factory Federal German Railways approval with appropriate certification and all necessary accessories: fire extinguisher, first aid kit, earth cable, red/white flag, torch with red dimmable light, loud hailer, digital speed measurement instrument, oil spill tarpaulin and oil binder\*
- Rotating beacons
- Working floodlight(s)
- Radio
- Refueling pump
- Track gauge 1435 mm\*
- TÜV-approval


Items marked with \* are a requirement for Federal German Railway approval

## Technical specification sheet road-rail excavator 1604ZW

### Main dimensions

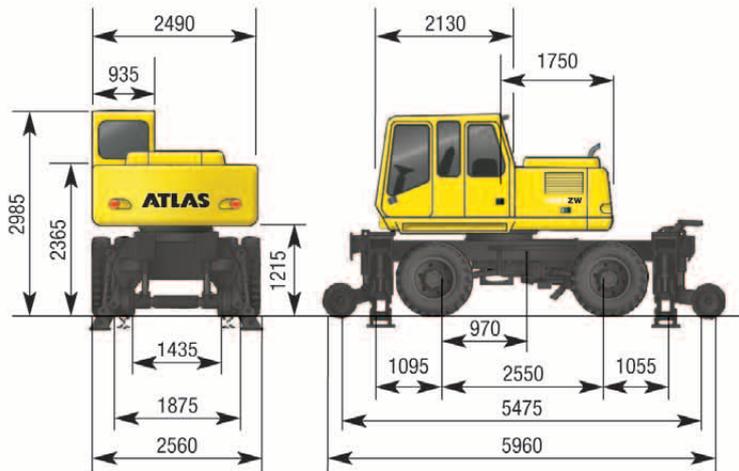

### Travel configuration with grab

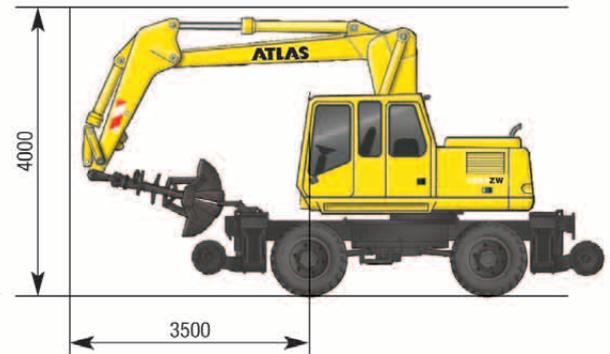

### Working equipment:

Base machine		Weight/kg	Standard equipment
A67.5	Rail-Road hydraulic excavator 1604 ZW, with 4 outriggers, tailswing 1750 mm	16500	<ul style="list-style-type: none"> <li>Narrow axles for underground and suburban railways</li> </ul>
<b>Additional and special equipment</b>			<ul style="list-style-type: none"> <li>Central lubrication</li> <li>Maintenance point for filtration system</li> </ul>
B66.41	Hose-rupture safety device for lifting cylinder, overload warning device	10	
B67.20	Heavy counterweight, tailswing 2000 mm	400	<ul style="list-style-type: none"> <li>Proportional Grab-rotation</li> </ul>
B66.39	Additional hydraulic unit for variable boom cylinder		<ul style="list-style-type: none"> <li>Hydraulic system for grab and grab rotation function</li> </ul>
B41.23	Two man fully glazed cab	300	<ul style="list-style-type: none"> <li>Tank indicator</li> <li>Battery main switch in negative lead</li> <li>"Travel" function via foot control</li> <li>Accumulator for emergency lowering of boom system</li> </ul>
<b>Base section of arm and boom</b>			<ul style="list-style-type: none"> <li>Traction increase</li> </ul>
C67.41P	Base arm with two lift cylinders and an internally mounted operating cylinder	1350	<ul style="list-style-type: none"> <li>Sliding window in cab door</li> <li>Power shift transmission</li> <li>Windshield washer system</li> <li>Tilt and height adjustable steering column</li> <li>Radio pre-installation</li> <li>Storage box in the cab</li> <li>Comfort seat with armrests and lumbar support</li> <li>Toolbox on chassis</li> <li>Sealed pivot points in the base section of the boom</li> <li>Boom and stick with 50 hour maintenance intervals</li> <li>Securing lug for securing the grab during road travel</li> <li>Air-conditioning</li> <li>Air dryer for compressed air system</li> </ul>
C66.46	Boom with articulating cylinder only for base arm C67.41P, working length 3300 mm	930	
<b>Sticks</b>			
D67.22	Rail-road excavator stick, working length 2240 mm	600	
<b>Bucket tipping cylinder</b>			
F66.1	Bucket tipping cylinder with reversing linkage	180	

# RAIL-ROAD EXCAVATOR

## Technical specification sheet road-rail excavator 1604ZW

### Engine

Power rating acc. to ISO 1585	95 kW (129 HP)
Effective output locked	93 kW (127 HP)
Manufacturer	Deutz
Type	BF4M 2012 EC
Displacement	4000 cm <sup>3</sup>
Rotational speed	2300 rpm
Design	Turbocharger/charge-air cooling

### Swing mechanism

Swing motor	axial piston motor with priority valve
Swing gear	planetary reduction
Swing brake	multi-disc brake
Drive via an internally toothed swing bearing	
Swing speed	9 rpm
Swing torque	59 kNm

### Hydraulic system

Computer controlled AWE4 system with a load limiting high performance piston-pump and fuel efficient on-demand power control for sensitive, proportional and load independent ramp-up of all operational movements

- Primary and secondary protection of the hydraulic system against overload
- Suction valve for all operational functions as well as restrictors in the lift and articulating circuits
- Pipe break protection valves for lifting cylinders

Hydraulic system	1 x AKP
Main pump	HPR 135
Max. flow variable capacity pump	300 l/min
Max. operating pressure for operating movements	340 bar

### Noise level

Noise level* is significantly below EC limits	
Ambience level (L <sub>vA</sub> )	104 dB (A)
Cab level (L <sub>vA</sub> )	76 dB (A)

\*Dynamic sound level measurement according to 2000/14 EC

### Electrical system

Operating voltage	24 Volt
Cold-start heavy duty battery	2 x 100 Ah
Electrical system in compliance with StVZO (Regulations Authorizing the Use of Vehicles for Road Traffic in Germany) and European standard	

### Brakes

Service brake	pneumatic-hydraulically actuated drum brake
Parking brake	pneumatically-operated spring-loaded parking brake
Emergency brake for use on rail	
Max. un-braked trailer load	40 t
Max. trailer load with wagon brake	120 t

### Fluid capacities

Fuel tank	230 l
Hydraulic tank	300 l
Engine oil	10 l

### Cab

Flexibly mounted • Heat absorbing extra wide windscreen for all-round vision • Glare-free interior • Ergonomic pilot control levers • Adjustable steering column • Lengthways adjustment of the seat independent of the control console • Front windscreen stowable under the cab roof • Second seat for mate

Type	Terex 935 two-man comfort cab
Overall length	2130 mm
Width	935 mm

### Power Transmission

40 t special excavator axles with planetary drives to all four wheel hubs

- All-wheel drive • Variable drive engine • Double acting travel brake valve
- Travel direction selector with steering column mounted lever or switch on pilot control lever
- Steering axle with automatic oscillation lock
- Travel controls via foot pedal valve • Power shift transmission • Traction increase

### Travel speed

Road and rail operation	
Crawling speed	max. 1.3 km/hour
Off-road speed	max. 5.6 km/hour
Highway speed	max. 20 km/hour
Rail guidance, track gauge 1435 mm, other widths on request	

### Tires

8 x	10.00 - 20
(inner tyre - highway, outer tyre - off highway tread pattern)	


### Weight

Operating weight	21.0 - 22.0 t
------------------	---------------



## Technical specification sheet road-rail excavator 1604ZW


### Working range grab

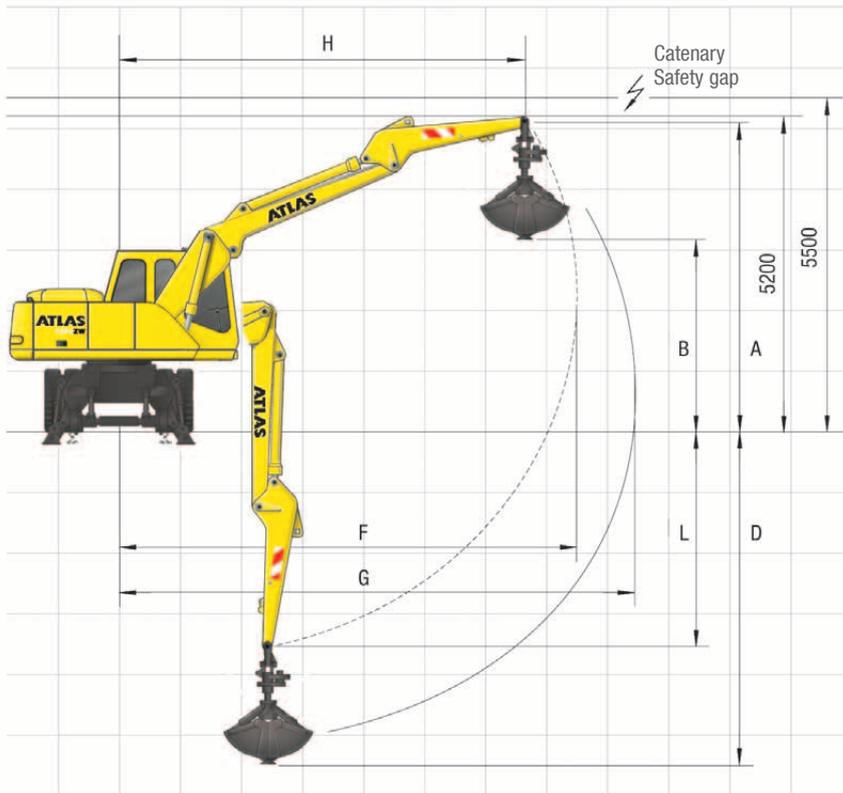

#### Stick D67.22 - working length 2240 mm

Equipment: A67.5, C67.41P, C66.46, D67.22, T31, E332, E346		Grab
S	Height of stick	mm 5100
B	Discharge height	mm 3150
D	Max. Digging depth	mm 5500
F	Max. Reach	mm 7450
G	Max. Reach	mm 8300
H	Max. arm position	mm 6600
J	Max. reach height	mm -
L	Bucket pivot point	mm 3550
Grab	l	450
	Grab clamping force	kN 72.8
	Operating weight	t 21.3

### Working range bucket

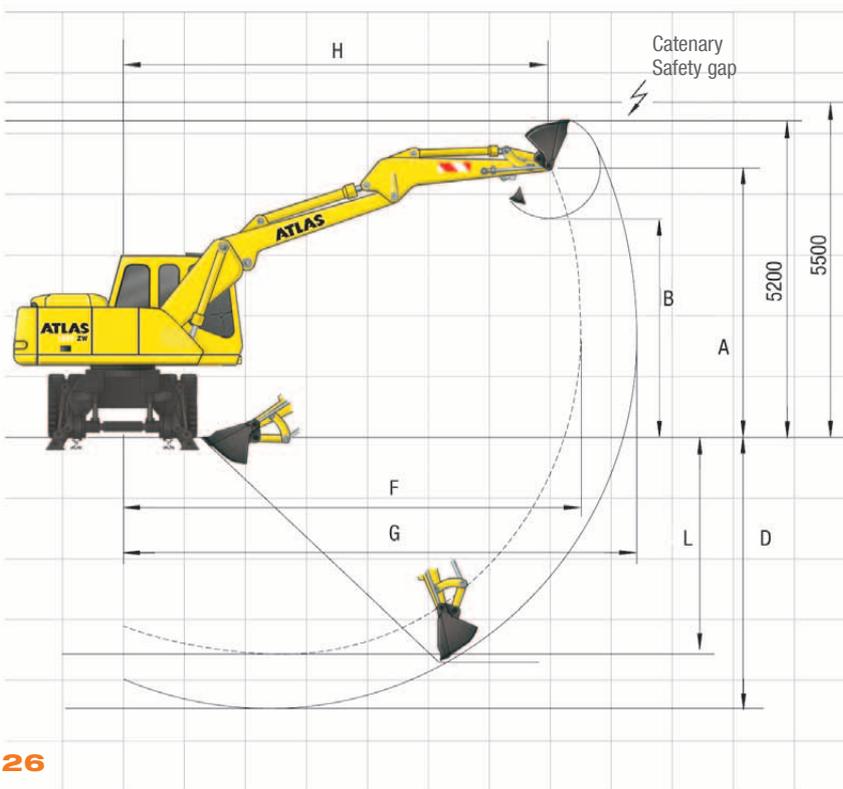

#### Stick D67.22 - working length 2240 mm

Equipment: A67.5, C67.41P, C66.46, D67.22, G649		Bucket
S	Height of stick	mm 4400
B	Discharge height	mm 3650
D	Max. Digging depth	mm 4450
F	Max. Reach	mm 7450
G	Max. Reach	mm 8350
H	Max. arm position	mm 6950
J	Max. reach height	mm -
L	Bucket pivot point	mm 3550
Buckets	l	800
	Stick digging force	kN 112
	Bucket digging force	kN 141
	Operating weight	t 21.0

# RAIL-ROAD EXCAVATOR

## Technical specification sheet road-rail excavator 1604ZW

### Base machine A67.5, C67.41P, C66.46

#### Stick D67.22 - working length 2240 mm Tailswing 1750 mm

Hook height m		3.0 m		4.0 m		4.5 m		5.0 m		6.0 m		7.0 m	
		l	q	l	q	l	q	l	q	l	q	l	q
5	a	-	-	-	-	6.9	5.7	6.5	4.9	6.0	3.7	-	-
	b	-	-	-	-	6.9	3.6	6.5	3.1	6.0	2.3	-	-
4	a	-	-	7.7	6.7	7.2	5.7	6.7	4.9	6.0	3.7	-	-
	b	-	-	7.7	4.1	7.2	3.5	6.7	3.1	6.0	2.3	-	-
3	a	11.0	10.1	9.4	6.5	8.3	5.5	7.5	4.8	6.4	3.7	5.7	2.8
	b	11.0	5.8	9.4	4.0	8.3	3.4	7.5	3.0	6.4	2.3	5.7	1.7
1	a	12.7	9.9	10.6	6.4	9.2	5.5	8.2	4.8	6.8	3.6	5.8	2.7
	b	12.7	5.7	10.6	3.9	9.2	3.4	8.2	3.0	6.8	2.2	5.8	1.6
0	a	14.6	9.7	10.7	6.3	9.4	5.3	8.4	4.6	6.9	3.4	5.7	2.7
	b	14.6	5.5	10.7	3.8	9.4	3.2	8.4	2.8	6.9	2.1	5.7	1.6
-1	a	15.1	9.3	10.9	6.1	9.5	5.1	8.6	4.4	6.7	3.3	-	-
	b	15.1	5.2	10.9	3.5	9.5	3.0	8.6	2.6	6.7	1.9	-	-
-2	a	15.0	9.4	10.1	5.9	8.3	5.0	-	-	-	-	-	-
	b	15.0	5.2	10.1	3.4	8.3	2.9	-	-	-	-	-	-

a = travel on road permitted, b = travel on rail permitted, q = lateral, l = longitudinal

All values in tonnes (t) were determined acc. to ISO 10567 and include a stability factor of 1.33 or 87% of the hydraulic lifting capacity. These values are applicable at the top of the arm with optimum positioning of the corresponding boom system.

#### Stick D67.22 - working length 2240 mm Tailswing 2000 mm

Hook height m		3.0 m		4.0 m		4.5 m		5.0 m		6.0 m		7.0 m	
		l	q	l	q	l	q	l	q	l	q	l	q
5	a	-	-	-	-	6.9	6.0	6.5	5.1	6.0	3.9	-	-
	b	-	-	-	-	6.9	3.8	6.5	3.3	6.0	2.5	-	-
4	a	-	-	7.7	7.1	7.2	6.0	6.7	5.1	6.0	3.9	-	-
	b	-	-	7.7	4.4	7.2	3.8	6.7	3.3	6.0	2.5	-	-
3	a	11.0	10.5	9.4	6.9	8.3	5.8	7.5	5.0	6.4	3.9	5.7	2.9
	b	11.0	6.2	9.4	4.2	8.3	3.6	7.5	3.2	6.4	2.5	5.7	1.8
1	a	12.7	10.4	10.6	6.8	9.2	5.8	8.2	5.0	6.8	3.8	5.8	2.9
	b	12.7	6.1	10.6	4.2	9.2	3.6	8.2	3.2	6.8	2.4	5.8	1.8
0	a	14.6	10.2	10.7	6.6	9.4	5.6	8.4	4.8	6.9	3.6	5.7	2.8
	b	14.6	5.9	10.7	4.0	9.4	3.5	8.4	3.0	6.9	2.2	5.7	1.7
-1	a	15.1	9.9	10.9	6.4	9.5	5.4	8.6	4.6	6.7	3.5	-	-
	b	15.1	5.6	10.9	3.8	9.5	3.3	8.6	2.8	6.7	2.1	-	-
-2	a	15.0	9.9	10.1	6.3	8.3	5.2	-	-	-	-	-	-
	b	15.0	5.6	10.1	3.7	8.3	3.1	-	-	-	-	-	-

#### Rail guidance

Track gauge 1435 mm, other widths on request.

#### CARSY (Computer assisted rail contact pressure system)

Automatic system for regulating and monitoring the force of the rail guide wheels. The required pressures are automatically set, continuously monitored and adjusted if necessary. Depending on the pre-selected operating condition, each separate guidance bogie wheel is set to a different pressure in accordance with a prescribed schedule, locked or hydraulically trailed.

The front and rear bogie wheels can be independently switched to permit simple de-railing and positive crossing of rail points.

Automatic self-diagnosis of the electronic system. Emergency function: de-railing is assured even in the event of a fault or complete breakdown.

#### Operating weights, tailswing

Type	Configuration	Operating weight with boom adjusting mechanism	Tailswing mm	Can be operated on the network of the German Federal Railways.
1604 ZW, with 4 outriggers	A67.5	approx. 21.0 t	1750	Track spacing $\geq 3700$ mm
1604 ZW, with 4 outriggers	A67.5	approx. 21.5 t	2000	Track spacing $\geq 4000$ mm

#### Approvals

The equipment marked \* is an essential requirement of the German Federal Railways for operation on their network. The safety testing is conducted by the health and safety executive (Berufsgenossenschaft), compliance with the appropriate regulations is verified by the German Federal Railways and the TÜV.

#### Additional and special equipment

- Short tailswing version (1750 or 2000 mm tailswing)\*
- Two-man cab\*
- Auxiliary heating
- Hose-rupture safety device for lifting operation, overload warning device\*
- Trailer hitch on chassis\*
- Emergency manual hydraulic pump\*
- Special tow bar\*
- German Federal Railways approved lights\*
- Lift limitation electronically adjustable from the cab\*
- Swing limitation adjustable from the cab\*
- Wagon brake unit with footplate brake valve, permitted trailer load is 120 t
- Factory Federal German Railways approval with appropriate certification and all necessary accessories: fire extinguisher, first aid kit, earth cable, red/white flag, torch with red dimmable light, loud hailer, digital speed measurement instrument, oil spill tarpaulin and oil binder\*
- Rotating beacons
- Working floodlight(s)
- Radio
- Refueling pump
- Rail bogie with track gauges of up to approx. 1700 mm
- TÜV-approval

Items marked with \* are a requirement for Federal German Railway approval

# ATLAS



**ATLAS Maschinen GmbH**  
EXCAVATORS  
Atlasstrasse 6  
27777 Ganderkesee, Germany  
T: +49 (0) 4222 954 0  
F: +49 (0) 4222 954 343  
info@atlasgmbh.com

Distributor

[www.atlasgmbh.com](http://www.atlasgmbh.com)

ZW Rail-road excavators EN (1) Effective date: August 2010. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Atlas Maschinen GmbH and/or its subsidiaries. All rights are reserved. Atlas® is a registered trademark of Atlas Maschinen GmbH. Copyright © 2010 Atlas Maschinen GmbH.

Ref. no. 6141754